

**PROJECT MANUAL  
FOR**

**PUBLIC WORKS HVAC IMPROVEMENTS  
201 S. BOULEVARD  
OAK PARK, ILLINOIS 60302**

**OWNER**

**VILLAGE OF OAK PARK  
123 MADISON STREET  
OAK PARK, ILLINOIS 60302**

**ARCHITECT / ENGINEER**

**KLUBER, INC.  
41 W. BENTON STREET  
AURORA, ILLINOIS 60506**



**BID & PERMIT – 05/15/2024**

**SECTION 00 01 01  
PROJECT TITLE PAGE**

**PROJECT MANUAL**

**FOR**

**PUBLIC WORKS HVAC IMPROVEMENTS**

**201 SOUTH BOULEVARD**

**OAK PARK, ILLINOIS 60302**

**OWNER**

**VILLAGE OF OAK PARK**

**201 SOUTH BOULEVARD**

**OAK PARK, ILLINOIS 60302**

**ARCHITECT / ENGINEER**

**KLUBER ARCHITECTS + ENGINEERS**

**41 W. BENTON STREET**

**AURORA, ILLINOIS 60506**



**END OF DOCUMENT**

SECTION 00 01 07  
SEALS PAGE

1.01 DESIGN PROFESSIONALS' SEALS

A. MECHANICAL  
ENGINEER

B. ELECTRICAL  
ENGINEER

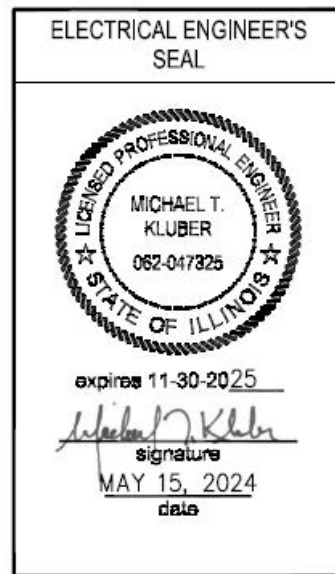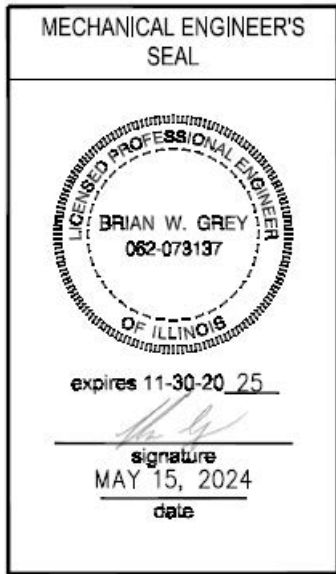

END OF DOCUMENT

**SECTION 00 01 10  
TABLE OF CONTENTS**

<b>PROCUREMENT AND CONTRACTING REQUIREMENTS</b>		<b>PAGES</b>
<b>INTRODUCTORY INFORMATION</b>		
00 01 01	Project Title Page	00 01 01-1-1
00 01 07	Seals Page	00 01 07-1-1
00 01 10	Table of Contents	00 01 10-1-1
00 01 15	Drawing Index	00 01 15-1-1
<b>BIDDING REQUIREMENTS</b>		
00 31 13	Preliminary Schedule	00 31 13-1-1
<b>SPECIFICATIONS</b>		<b>PAGES</b>
<b>DIVISION 01 -- GENERAL REQUIREMENTS</b>		
01 10 00	Summary	01 10 00-1-1
01 20 00	Price and Payment Procedures	01 20 00-1-5
01 21 00	Allowances	01 21 00-1-1
01 23 00	Alternates	01 23 00-1-1
01 30 00	Administrative Requirements	01 30 00-1-10
01 40 00	Quality Requirements	01 40 00-1-2
01 41 00	Regulatory Requirements	01 41 00-1-2
01 42 00	References	01 42 00-1-5
01 50 00	Temporary Facilities and Controls	01 50 00-1-2
01 60 00	Product Requirements	01 60 00-1-5
01 70 00	Execution and Closeout Requirements	01 70 00-1-5
01 77 00	Closeout Procedures	01 77 00-1-2
01 78 00	Closeout Submittals	01 78 00-1-2
01 79 00	Demonstration and Training	01 79 00-1-3
<b>DIVISION 02 -- EXISTING CONDITIONS</b>		
02 41 00	Demolition	02 41 00-1-3
<b>DIVISION 26 -- ELECTRICAL</b>		
26 05 00	Basic Electrical Requirements	26 05 00-1-6
26 05 83	Wiring Connections	26 05 83-1-3
<b>END OF SECTION</b>		

**SECTION 00 01 15  
DRAWING INDEX**

**1.01 GENERAL**

G100 COVER SHEET, GENERAL NOTES, SYMBOLS & DRAWING INDEX

**1.02 MECHANICAL**

ME300 BASEMENT MECHANICAL PLAN AND DETAILS

ME310 FIRST FLOOR MECHANICAL PLAN AND DETAILS

ME320 SECOND FLOOR MECHANICAL PLAN & PARTIAL ROOF MECHANICAL PLAN

ME410 MECHANICAL SCHEDULES AND DETAILS

**END OF DOCUMENT**

**SECTION 00 31 13  
PRELIMINARY SCHEDULE**

**1.01 GENERAL**

- A. The following represents the preliminary construction schedule for the Work. This schedule is the current estimate of the Owner to be used for purposes of bidding. All Bidders shall include the costs of all overtime, double-shift, or so-called "premium" time that may be necessary to meet this milestone.

**1.02 PRELIMINARY SCHEDULE**

- A. Award of Contract: July 30, 2024
- B. Commencement of Construction: Week of August 5, 2024
- C. Substantial Completion: October 18, 2024

**END OF DOCUMENT**

**SECTION 01 10 00  
SUMMARY**

**PART 1 GENERAL**

**1.01 PROJECT**

- A. Project Name: PUBLIC WORKS HVAC IMPROVEMENTS.
- B. Owner's Name: Owner's Actual Name.
- C. Architect/Engineer's Name: Kluber Architects + Engineers.
- D. The Project consists of the repair and replacing existing roof and fascia areas of the existing fire station facility.

**1.02 CONTRACT DESCRIPTION**

- A. Refer to Owner's bidding and procurements requirements.

**1.03 DESCRIPTION OF ALTERATIONS WORK**

- A. Scope of demolition and removal work is indicated on drawings and specified in Section 02 41 00.
- B. Scope of alterations work is indicated on drawings.

**1.04 OWNER OCCUPANCY**

- A. Owner intends to continue to occupy adjacent portions of the existing building during the entire construction period.
- B. Cooperate with Owner to minimize conflict and to facilitate Owner's operations.
- C. Schedule the Work to accommodate Owner occupancy.

**1.05 CONTRACTOR USE OF SITE AND PREMISES**

- A. Construction Operations: Limited to areas noted on Drawings.
  - 1. Locate and conduct construction activities in ways that will limit disturbance to site.
- B. Provide access to and from site as required by law and by Owner:
  - 1. Emergency Building Exits During Construction: Keep all exits required by code open during construction period; provide temporary exit signs if exit routes are temporarily altered.
  - 2. Do not obstruct roadways, sidewalks, or other public ways without permit.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

**SECTION 01 20 00  
PRICE AND PAYMENT PROCEDURES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Procedures for preparation and submittal of applications for progress payments.
- B. Documentation of changes in Contract Sum and Contract Time.
- C. Change procedures.
- D. Correlation of Contractor submittals based on changes.
- E. Procedures for preparation and submittal of application for final payment.

**1.02 RELATED REQUIREMENTS**

- A. Owner's bidding and procurement requirements.
- B. Section 01 78 00 - Closeout Submittals: Project record documents.
- C. Section 01 77 00 - Closeout Procedures: Final Payment.

**1.03 SCHEDULE OF VALUES**

- A. Use Schedule of Values Form: AIA G703, edition stipulated in the Agreement.
- B. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit draft to Architect/Engineer for approval.
- C. Forms filled out by hand will not be accepted.
- D. Submit Schedule of Values to the Architect/Engineer at earliest possible date, but no later than 14 days prior to first Pay Request Meeting.
  - 1. After review by the Architect/Engineer, revise and resubmit Schedule as directed.
- E. Format: Utilize the Table of Contents of this Project Manual as a format for the listing of the Work.
- F. Identify as separate line items on the Schedule the costs for the following items:
  - 1. Bonds.
  - 2. Insurance.
  - 3. Site Mobilization.
  - 4. Construction Submittals.
  - 5. General Conditions.
  - 6. Allowances (list each Allowance on a separate line; See Section 01 21 00).
  - 7. Contractor's overhead and profit.
- G. Submit Schedule of Values in sufficient detail for the Architect/Engineer to use in evaluation of Applications for Payment.
  - 1. Itemize the cost of the work of:
    - a. Contractor's materials from stock.
    - b. Contractor's own shop labor.
    - c. Contractor's own field labor.



- d. Subcontractors' materials from stock.
- e. Subcontractors' shop labor.
- f. Subcontractors' field labor.
- g. Suppliers of products and equipment.

H. Revise Schedule of Values to list approved Change Orders, with each Application For Payment.

#### **1.04 APPLICATIONS FOR PROGRESS PAYMENTS**

- A. Payment Period: Submit at intervals stipulated in the Agreement.
- B. Use Form AIA G702 and Form AIA G703, edition stipulated in the Agreement.
- C. Electronic media printout including equivalent information will be considered in lieu of standard form specified; submit sample to Architect/Engineer for approval.
- D. Forms filled out by hand will not be accepted.
- E. For each item, provide a column for listing each of the following:
  - 1. Item Number.
  - 2. Description of work.
  - 3. Scheduled Values.
  - 4. Previous Applications.
  - 5. Work in Place and Stored Materials under this Application.
  - 6. Authorized Change Orders.
  - 7. Total Completed and Stored to Date of Application.
  - 8. Percentage of Completion.
  - 9. Balance to Finish.
  - 10. Retainage.
- F. Execute certification by signature of authorized officer.
- G. Use data from approved Schedule of Values. Provide dollar value in each column for each line item for portion of work performed and for stored products.
- H. List each authorized Change Order as a separate line item, listing Change Order number and dollar amount as for an original item of Work.
- I. Submit one pencil/draft copy of each Application for Payment to the Architect/Engineer at least 7 days prior to the due date for the submission of the Application.
- J. Contractor or Architect/Engineer may schedule a Pay Request Meeting to review the pencil/draft copy of the Application for agreement with the progress of the Work.
- K. After receipt of Architect/Engineer's review comments, submit three final copies, signed and notarized, of each Application for Payment.
- L. Include the following with the application:
  - 1. Transmittal letter as specified for submittals in Section 01 30 00.
  - 2. Construction progress schedule, revised and current as specified in Section 01 30 00.
  - 3. Contractor's partial waiver of lien in the amount of the Application for Payment as well as trailing partial waivers of lien for subcontractors and suppliers who were included in the previous Application for Payment, to the extent of that payment.

- a. When an Application shows completion of a subcontractor or supplier item, submit a final or full waiver for that item.
  - b. Waivers of lien shall be submitted on forms and executed in a manner acceptable to the Owner.
4. Email confirmations and copies of certified transcripts of payroll records accompanying those confirmations from the Illinois Department of Labor for the Contractor and for all Subcontractors and Sub-subcontractors employed on the Project who performed work on the Project during the Payment Period.
    - a. Contractor shall assemble his and all subcontractor and sub-subcontractor records prior to submitting each Application for Payment.
    - b. Applications for Payment submitted without IDOL confirmation emails and transcripts or with missing IDOL confirmation emails or transcripts will result in payment being delayed until the Contractor complies fully with the requirements set forth in the preceding paragraphs.
  5. Affidavits attesting to products or equipment suitably stored off-site in a bonded warehouse. Payments for materials stored off-site shall be conditioned upon submission of bills of sale, applicable insurance, and any other documentation or procedures satisfactory to the Owner to establish the Owner's title to such materials, or otherwise protect the Owner's interest.
- M. When Architect/Engineer requires substantiating information, submit data justifying dollar amounts in question. Provide one copy of data with cover letter for each copy of submittal. Show application number and date, and line item by number and description.

#### **1.05 MODIFICATION PROCEDURES**

- A. Submit name of the individual authorized to receive change documents and who will be responsible for informing others in Contractor's employ or subcontractors of changes to the Contract Documents.
- B. For minor changes not involving an adjustment to the Contract Sum or Contract Time, Architect/Engineer will issue instructions directly to Contractor.
- C. For other required changes, Architect/Engineer will issue a document signed by Owner instructing Contractor to proceed with the change, for subsequent inclusion in a Change Order.
  1. The document will describe the required changes and will designate method of determining any change in Contract Sum or Contract Time.
  2. Promptly execute the change.
- D. For changes for which advance pricing is desired, Architect/Engineer will issue a document that includes a detailed description of a proposed change with supplementary or revised drawings and specifications, a change in Contract Time for executing the change with a stipulation of any overtime work required and the period of time during which the requested price will be considered valid. Contractor shall prepare and submit a fixed price quotation within ten (10) days.
- E. Contractor may propose a change by submitting a request for change to Architect/Engineer, describing the proposed change and its full effect on the Work, with a statement describing the reason for the change, and the effect on the Contract Sum and Contract Time with full documentation and a statement describing the effect on Work by separate or other contractors. Document any requested substitutions in accordance with Section 01 60 00.

- F. Computation of Change in Contract Amount: As specified in the Agreement and Conditions of the Contract.
1. For change requested by Architect/Engineer for work falling under a fixed price contract, the amount will be based on Contractor's price quotation.
  2. For change requested by Contractor, the amount will be based on the Contractor's request for a Change Order as approved by Architect/Engineer.
  3. For pre-determined unit prices and quantities, the amount will be based on the fixed unit prices.
  4. For change ordered by Architect/Engineer without a quotation from Contractor, the amount will be determined by Architect/Engineer based on the Contractor's substantiation of costs as specified for Time and Material work.
- G. Substantiation of Costs: Provide full information required for evaluation.
1. On request, provide the following data:
    - a. Quantities of products, labor, and equipment.
    - b. Taxes, insurance, and bonds.
    - c. Overhead and profit.
    - d. Justification for any change in Contract Time.
    - e. Credit for deletions from Contract, similarly documented.
  2. Support each claim for additional costs with additional information:
    - a. Origin and date of claim.
    - b. Dates and times work was performed, and by whom.
    - c. Time records and wage rates paid.
    - d. Invoices and receipts for products, equipment, and subcontracts, similarly documented.
  3. For Time and Material work, submit itemized account and supporting data after completion of change, within time limits indicated in the Conditions of the Contract.
- H. Execution of Change Orders: Architect/Engineer will issue Change Orders for signatures of parties as provided in the Conditions of the Contract.
- I. After execution of Change Order, promptly revise Schedule of Values and Application for Payment forms to record each authorized Change Order as a separate line item and adjust the Contract Sum.
- J. Promptly revise progress schedules to reflect any change in Contract Time, revise sub-schedules to adjust times for other items of work affected by the change, and resubmit.
- K. Promptly enter changes in Project Record Documents.

## **1.06 APPLICATION FOR FINAL PAYMENT**

- A. Prepare Application for Final Payment as specified for progress payments, identifying total adjusted Contract Sum, previous payments, and sum remaining due.
- B. Application for Final Payment will not be considered until the following have been accomplished:
1. All closeout procedures specified in Section 01 70 00.
  2. Procedures outlined in Article 9 of the General Conditions as amended.
  3. Additional closeout procedures specified in Section 01 77 00.
- C. The submittal of Final Waiver of Lien and the acceptance of the final payment by the Contractor shall be held to be a waiver of any and all claims against the Owner arising from, out of, or in any

connection with the Contract.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

**SECTION 01 21 00  
ALLOWANCES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Contingency allowance.
- B. Payment and modification procedures relating to allowances.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 20 00 - Price and Payment Procedures: Additional payment and modification procedures.

**1.03 CONTINGENCY ALLOWANCES**

- A. Contractor's costs for products, delivery, installation, labor, payroll, taxes and equipment rental will be included in Change Orders authorizing expenditure of funds from this Contingency Allowance.
- B. Funds will be drawn from the Contingency Allowance only by Change Order.
- C. Bond, insurance, overhead and profit fees on Change Orders paid out of Contingency Allowances will not be permitted. The Contractor must carry in its Base Bid OH&P costs on Contingency Allowance funds expenditures.
- D. At closeout of Contract, funds remaining in Contingency Allowance will be credited to Owner by Change Order.

**1.04 ALLOWANCES SCHEDULE**

- A. Contingency Allowance: Include in the Base Bid the stipulated sum of \$25,000.00 for use upon Owner's instructions.
- B. Contingency Allowance - Alternate No. 4: Include in the Alternate Bid the stipulated sum of \$10,000.00 for use upon Owner's instructions.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

**SECTION 01 23 00  
ALTERNATES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Documentation of changes to Contract Sum and Contract Time.

**1.02 RELATED REQUIREMENTS**

- A. Owner's bidding and procurement requirements.

**1.03 ACCEPTANCE OF ALTERNATES**

- A. Alternates quoted on Bid Forms will be reviewed and accepted or rejected at Owner's option. Accepted Alternates will be identified in the Owner-Contractor Agreement.
- B. Coordinate related work and modify surrounding work to integrate the Work of each Alternate.

**1.04 SCHEDULE OF ALTERNATES**

- A. Alternate No. 1 – Replace existing electric duct heater EDH-1 at the first-floor level. See Sheets ME310 and ME410.
- B. Alternate No. 2 – Removal, replacement and raising of the ductwork in the salt storage area at the first-floor level. See Sheet ME310.
- C. Alternate No. 3 – Provide unit cost for the replacement of the Unit Heaters not included in the Base Bid. Provide a per unit cost based on each specific Unit Heater capacity. Owner will elect which units will be replaced based on overall Project budget. See Sheets ME300, ME310, ME320 and ME410.
- D. Alternate No. 4 – Provide testing of nine (9) Fire Dampers to identify required repairs and/or replacement. Include an additional Allowance of \$10,000 in addition to the testing costs to incorporate required repairs and/or replacement. See Sheets ME310 and ME320.
- E. Alternate No. 5 – Removal and replacement of Exhaust Fan EF-1. See Sheet ME320.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

**SECTION 01 30 00  
ADMINISTRATIVE REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. General administrative requirements.
- B. Preconstruction meeting.
- C. Progress meetings.
- D. Construction progress schedule.
- E. Architect/Engineer-provided CAD files.
- F. Requests for Information (RFI) procedures.
- G. Submittals for review, information, and project closeout.
- H. Number of copies of submittals.
- I. Submittal procedures.

**1.02 RELATED REQUIREMENTS**

- A. Owner's bidding and procurement requirements.
- B. Section 01 60 00 - Product Requirements: General product requirements.
- C. Section 01 70 00 - Execution and Closeout Requirements: Additional coordination requirements.
- D. Section 01 78 00 - Closeout Submittals: Project record documents; operation and maintenance data; warranties and bonds.

**1.03 GENERAL ADMINISTRATIVE REQUIREMENTS**

- A. Comply with requirements of Section 01 70 00 - Execution and Closeout Requirements for coordination of execution of administrative tasks with timing of construction activities.
- B. Make the following types of submittals to Architect/Engineer:
  - 1. Requests for Information (RFI).
  - 2. Requests for substitution.
  - 3. Shop drawings, product data, and samples.
  - 4. Test and inspection reports.
  - 5. Design data.
  - 6. Manufacturer's instructions and field reports.
  - 7. Applications for payment and change order requests.
  - 8. Progress schedules.
  - 9. Coordination drawings.
  - 10. Correction Punch List and Final Correction Punch List for Substantial Completion.
  - 11. Closeout submittals.

## **PART 2 PRODUCTS - NOT USED**

## **PART 3 EXECUTION**

### **3.01 PRECONSTRUCTION MEETING**

- A. Architect/Engineer will schedule a meeting and prepare agenda after Notice of Award.
- B. Attendance required:
  - 1. Owner.
  - 2. Architect/Engineer.
  - 3. Contractor.
- C. Agenda:
  - 1. Execution of Owner-Contractor Agreement.
  - 2. Submission of executed bonds and insurance certificates.
  - 3. Distribution of Contract Documents.
  - 4. Submission of list of subcontractors, list of products, schedule of values, and progress schedule.
  - 5. Designation of personnel representing the parties to Contract and Architect/Engineer.
  - 6. Procedures and processing of field decisions, Submittals, substitutions, applications for payments, proposal request, Change Orders, and Contract closeout procedures.
  - 7. Scheduling.
  - 8. Scheduling activities of a Geotechnical Engineer.
- D. Architect will record minutes and distribute after meeting to participants.

### **3.02 PROGRESS MEETINGS**

- A. Make arrangements for meetings, prepare agenda with copies for participants, preside at meetings.
- B. Attendance Required:
  - 1. Contractor.
  - 2. Owner.
  - 3. Architect/Engineer.
  - 4. Contractor's superintendent.
- C. Agenda:
  - 1. Review minutes of previous meetings.
  - 2. Review of work progress.
  - 3. Field observations, problems, and decisions.
  - 4. Identification of problems that impede, or will impede, planned progress.
  - 5. Review of Submittals schedule and status of Submittals.
  - 6. Maintenance of progress schedule.
  - 7. Corrective measures to regain projected schedules.
  - 8. Planned progress during succeeding work period.
  - 9. Maintenance of quality and work standards.
  - 10. Effect of proposed changes on progress schedule and coordination.
  - 11. Other business relating to work.



- D. Record minutes and distribute within 2 days after meeting to participants, and to Architect/Engineer, Owner, participants, and those affected by decisions made.

### **3.03 CONSTRUCTION PROGRESS SCHEDULE**

- A. If preliminary schedule requires revision after review, submit revised schedule within 7 days.
- B. Submit updated schedule with each Application for Payment.

### **3.04 ARCHITECT/ENGINEER-PROVIDED CAD FILES**

- A. After the execution of the Contract, Architect/Engineer will provide, free of charge, upon receipt of a properly completed and signed request utilizing "Electronic Data Transfer Consent Form" at the end of this Specification Section, CAD files depicting graphic information for the project as follows:
  - 1. Architectural Floor Plans: Column grid, walls, floors, stairs, doors, windows, room numbers, ceiling grid, mechanical diffusers, plumbing fixtures, sprinkler heads (if depicted in Bid Documents) and lights.
- B. Contractor acknowledges and accepts that the Architectural Floor Plans do not contain structural, mechanical, electrical, plumbing, fire protection and other building systems information depicted in the Bidding Documents. Examples of information not contained in these files include, but are not limited to, title blocks, keynotes, schedules, mechanical ductwork and equipment, electrical device symbols, circuit numbers and home runs, plumbing equipment, piping runs and riser diagrams, and architectural/engineering text or details. No other CAD files, data or information will be provided.
- C. Only requests from Prime Contractors will be honored. Subcontractors must obtain the files from their respective Prime Contractors.
- D. In submitting a request, Contractor acknowledges that:
  - 1. Architect/Engineer bears no responsibility for the data or its transmission,
  - 2. Use of the data by the Contractor or his Subcontractors in no way relieves the Contractor of his obligations under the Contract,
  - 3. Contractor is solely liable for any and all claims arising from any and all products generated by the Contractor or its Subcontractors employing the data,
  - 4. Contractor and its Subcontractors have a limited, non-exclusive license to use the data solely in connection with the Work of the Project, and that
  - 5. Architect/Engineer retains all rights, including copyright, to the data.

### **3.05 REQUESTS FOR INFORMATION (RFI)**

- A. Definition: A request seeking one of the following:
  - 1. An interpretation, amplification, or clarification of some requirement of Contract Documents arising from inability to determine from them the exact material, process, or system to be installed; or when the elements of construction are required to occupy the same space (interference); or when an item of work is described differently at more than one place in Contract Documents.
  - 2. A resolution to an issue which has arisen due to field conditions and affects design intent.
- B. Whenever possible, request clarifications at the next appropriate project progress meeting, with response entered into meeting minutes, rendering unnecessary the issuance of a formal RFI.

- C. Preparation: Prepare an RFI immediately upon discovery of a need for interpretation of Contract Documents. Failure to submit a RFI in a timely manner is not a legitimate cause for claiming additional costs or delays in execution of the work.
1. Prepare a separate RFI for each specific item.
    - a. Review, coordinate, and comment on requests originating with subcontractors and/or materials suppliers.
    - b. Do not forward requests which solely require internal coordination between subcontractors.
  2. Prepare in a format and with content acceptable to Owner.
    - a. Use AIA G716 - Request for Information .
  3. Combine RFI and its attachments into a single electronic file. PDF format is preferred.
- D. Reason for the RFI: Prior to initiation of an RFI, carefully study all Contract Documents to confirm that information sufficient for their interpretation is definitely not included.
1. Include in each request Contractor's signature attesting to good faith effort to determine from Contract Documents information requiring interpretation.
  2. Unacceptable Uses for RFIs: Do not use RFIs to request the following:
    - a. Approval of submittals (use procedures specified elsewhere in this section).
    - b. Approval of substitutions (see Section - 01 60 00 - Product Requirements)
    - c. Changes that entail change in Contract Time and Contract Sum (comply with provisions of the Conditions of the Contract).
    - d. Different methods of performing work than those indicated in the Contract Drawings and Specifications (comply with provisions of the Conditions of the Contract).
  3. Improper RFIs: Requests not prepared in compliance with requirements of this section, and/or missing key information required to render an actionable response. They will be returned without a response, with an explanatory notation.
  4. Frivolous RFIs: Requests regarding information that is clearly indicated on, or reasonably inferable from, Contract Documents, with no additional input required to clarify the question. They will be returned without a response, with an explanatory notation.
    - a. The Owner reserves the right to assess the Contractor for the costs (on time-and-materials basis) incurred by the Architect/Engineer, and any of its consultants, due to processing of such RFIs.
- E. Content: Include identifiers necessary for tracking the status of each RFI, and information necessary to provide an actionable response.
1. Official Project name and number, and any additional required identifiers established in Contract Documents.
  2. Owner's, Architect/Engineer's, and Contractor's names.
  3. Discrete and consecutive RFI number, and descriptive subject/title.
  4. Issue date, and requested reply date.
  5. Reference to particular Contract Document(s) requiring additional information/interpretation. Identify pertinent drawing and detail number and/or specification section number, title, and paragraph(s).
  6. Annotations: Field dimensions and/or description of conditions which have engendered the request.
  7. Contractor's suggested resolution: A written and/or a graphic solution, to scale, is required in cases where clarification of coordination issues is involved, for example; routing, clearances, and/or specific locations of work shown diagrammatically in Contract Documents. If applicable, state the likely impact of the suggested resolution on Contract Time or the Contract Sum.

- F. Attachments: Include sketches, coordination drawings, descriptions, photos, submittals, and other information necessary to substantiate the reason for the request.
- G. RFI Log: Prepare and maintain a tabular log of RFIs for the duration of the project.
  - 1. Indicate current status of every RFI. Update log promptly and on a regular basis.
  - 2. Note dates of when each request is made, and when a response is received.
  - 3. Highlight items requiring priority or expedited response.
  - 4. Highlight items for which a timely response has not been received to date.
  - 5. Identify and include improper or frivolous RFIs.
- H. Review Time: Architect/Engineer will respond and return RFIs to Contractor within seven calendar days of receipt. For the purpose of establishing the start of the mandated response period, RFIs received after 3:00 PM will be considered as having been received on the following regular working day.
  - 1. Response period may be shortened or lengthened for specific items, subject to mutual agreement, and recorded in a timely manner in progress meeting minutes.
- I. Responses: Content of answered RFIs will not constitute in any manner a directive or authorization to perform extra work or delay the project. If in Contractor's belief it is likely to lead to a change to Contract Sum or Contract Time, promptly issue a notice to this effect, and follow up with an appropriate Change Order request to Owner.
  - 1. Response may include a request for additional information, in which case the original RFI will be deemed as having been answered, and an amended one is to be issued forthwith. Identify the amended RFI with an R suffix to the original number.
  - 2. Do not extend applicability of a response to specific item to encompass other similar conditions, unless specifically so noted in the response.
  - 3. Upon receipt of a response, promptly review and distribute it to all affected parties, and update the RFI Log.
  - 4. Notify Architect/Engineer within seven calendar days if an additional or corrected response is required by submitting an amended version of the original RFI, identified as specified above.

### **3.06 SUBMITTAL SCHEDULE**

- A. Submit to Architect/Engineer for review a schedule for submittals in tabular format.
  - 1. Submit at the same time as the preliminary schedule.
  - 2. Coordinate with Contractor's construction schedule and schedule of values.
  - 3. Format schedule to allow tracking of status of submittals throughout duration of construction.
  - 4. Arrange information to include scheduled date for initial submittal, specification number and title, submittal category (for review or for information), description of item of work covered, and role and name of subcontractor.
  - 5. Account for time required for preparation, review, manufacturing, fabrication and delivery when establishing submittal delivery and review deadline dates.
    - a. For assemblies, equipment, systems comprised of multiple components and/or requiring detailed coordination with other work, allow for additional time to make corrections or revisions to initial submittals, and time for their review.

### **3.07 SUBMITTALS FOR REVIEW**

- A. When the following are specified in individual sections, submit them for review:
  - 1. Product data.

2. Shop drawings.
  3. Samples for selection.
  4. Samples for verification.
- B. Submit to Architect/Engineer for review for the limited purpose of checking for compliance with information given and the design concept expressed in Contract Documents.
- C. Samples will be reviewed for aesthetic, color, or finish selection.
- D. After review, provide copies and distribute in accordance with Submittal PROCEDURES article below and for record documents purposes described in Section 01 78 00 - Closeout Submittals.

### **3.08 SUBMITTALS FOR INFORMATION**

- A. When the following are specified in individual sections, submit them for information:
1. Design data.
  2. Certificates.
  3. Test reports.
  4. Inspection reports.
  5. Manufacturer's instructions.
  6. Manufacturer's field reports.
  7. Other types indicated.
- B. Submit for Architect/Engineer's knowledge as contract administrator or for Owner.

### **3.09 SUBMITTALS FOR PROJECT CLOSEOUT**

- A. Submit Correction Punch List for Substantial Completion.
- B. Submit Final Correction Punch List for Substantial Completion.
- C. When the following are specified in individual sections, submit them at project closeout in compliance with requirements of Section 01 78 00 - Closeout Submittals:
1. Project record documents.
  2. Operation and maintenance data.
  3. Warranties.
  4. Bonds.
  5. Other types as indicated.
- D. Submit for Owner's benefit during and after Project completion.

### **3.10 NUMBER OF COPIES OF SUBMITTALS**

- A. Documents for Review:
1. Submit via email in Adobe PDF electronic file format at native sheet size and right-side up. Architect/Engineer will return via email a reviewed copy in Adobe PDF electronic file format. Files not properly sized and rotated will be rejected. Illegible files will be rejected.
- B. Documents for Information: Submit via email in Adobe PDF electronic file format. Submitted documents are for Architect/Engineer's information and reference only, and will not be reviewed or returned.
- C. Samples: Submit the number specified in individual specification sections; one of which will be retained by Architect/Engineer.

1. Submit original, physical samples. With each physical sample, submit Adobe PDF electronic copies of scanned physical original samples. Architect/Engineer will return via email a reviewed scanned copy in Adobe PDF electronic file format.
2. Retained samples will not be returned to Contractor unless specifically so stated.

### 3.11 SUBMITTAL PROCEDURES

#### A. General Requirements:

1. Use a single transmittal for related items.
2. Submit separate packages of submittals for review and submittals for information, when included in the same specification section.
3. Transmit using approved form.
4. Number each submittal. Prefix the submittal number with the Specification Section number to which the submittal pertains. For revised submittals use original number and a sequential alphanumeric suffix. **Items submitted without a Specification Section number, or with an incorrect Specification Section number will delay the review process.**
5. Identify: Project; Contractor; subcontractor or supplier; pertinent drawing and detail number; and specification section number, article and paragraph, as appropriate on each copy.
6. Correlate submitted items with specified products; clearly indicate the specified product that corresponds to each submitted item. **Submitted items not clearly correlated with specified items will delay the review process.**
7. When options or optional features available for a Product are indicated in a Submittal, and selections for those options/features are indicated in the Contract Documents, identify on the Submittal the selection indicated in the Contract Documents. **Submittals that fail to identify specified options or optional features may be returned marked "Rejected" or "Revise and Resubmit".**
8. Apply Contractor's stamp, signed or initialed certifying that review, approval, verification of products required, field dimensions, adjacent construction work, and coordination of information is in accordance with the requirements of the work and Contract Documents.
  - a. Submittals from sources other than the Contractor, or without Contractor's transmittal will not be acknowledged, reviewed, or returned.
9. Deliver each submittal on date noted in submittal schedule, unless an earlier date has been agreed to by all affected parties, and is of the benefit to the project.
  - a. Deliver submittals to Architect/Engineer at business address.
10. Schedule submittals to expedite the Project, and coordinate submission of related items.
  - a. For each submittal for review, allow 15 days excluding delivery time to and from the Contractor.
  - b. For sequential reviews involving Architect/Engineer's consultants, Owner, or another affected party, allow an additional 7 days.
11. Clearly identify variations from the Contract Documents. Regardless of the type of variation, Contractor is solely responsible for errors in the field or performance issues that arise from Submittal variations from the requirements of the Contract Documents if those variations were not expressly noted to specifically identify for and describe to the reviewer the nature of the variation from the Contract Documents.
12. Provide space for Contractor's review stamp and a 4 inch x 3 inch clear space for Architect/Engineer's review stamp.
13. Promptly return submittals marked "Rejected" or "Revise and Resubmit" to originating subcontractor supplier, and faithfully ensure the prompt resubmittal of the correct or revised

information.

14. When revised for resubmission, identify all changes made since previous submission. Use clouds, highlights or other means acceptable to Architect/Engineer. **Resubmittals that do not clearly identify all changes may be delayed and/or returned to the Contractor unreviewed.**
15. Contractor is entitled to one (1) resubmittal of each Submittal For Review or Submittal For Project Closeout rejected by Architect/Engineer or returned by Architect/Engineer for further action. Thereafter, Contractor shall pay the cost of all further Architect/Engineer reviews of any Submittal For Review or Submittal for Project Closeout, at a rate of \$200.00/hour. Cost of such further reviews will be deducted from the Contract Sum by Change Order.
16. Promptly distribute and coordinate the requirements of reviewed submittals with affected parties. Instruct parties to promptly report inability to comply with requirements.
17. Where indicated on the Drawings or in respective product specification Sections, submit reviewed submittals to Authority Having Jurisdiction (AHJ).
18. Incomplete submittals will not be reviewed, unless they are partial submittals for distinct portion(s) of the work, and have received prior approval for their use.
19. Submittals not requested will be returned "Not Reviewed".

B. Product Data Procedures:

1. Submit only information required by individual specification sections.
2. Collect required information into a single submittal.
3. Submit concurrently with related shop drawing submittal.
4. Do not submit (Material) Safety Data Sheets for materials or products.

C. Shop Drawing Procedures:

1. Prepare accurate, drawn-to-scale, original shop drawing documentation by interpreting Contract Documents and coordinating related work.
2. Use of reproductions of the Contract Documents in digital data form to create shop drawings is only permitted as defined above under Architect/Engineer-Provided CAD Files.
3. Generic, non-project-specific information submitted as shop drawings do not meet the requirements for shop drawings.

D. Samples Procedures:

1. Transmit related items together as single package.
2. When relevant, identify each item to allow review for applicability in relation to shop drawings showing installation locations.

E. Submittal reviews may be delayed and/or Submittals may be returned marked "Rejected" or "Revise and Resubmit" for any of the following reasons:

1. Submittals submitted outside the scheduled dates of the Submittal Schedule.
2. Submittals are incomplete or are missing information.
3. Submittals are not submitted in accordance with procedures outlined in this Section, including, but not limited to:
  - a. Specification Section number not indicated on submittal or transmittal.
  - b. Contractor's review stamp missing.
  - c. Submitted items not correlated with specified products.
  - d. Re-submitted items not clearly identifying changes.

### 3.12 SUBMITTAL REVIEW

- A. Submittals for Review: Architect/Engineer will review each submittal, and approve, or take other appropriate action.
- B. Submittals for Information: Architect/Engineer will not acknowledge receipt, and take no other action.
- C. Architect/Engineer's actions will be reflected by marking each returned submittal using virtual stamp on electronic submittals.
  - 1. Notations may be made directly on submitted items and/or listed on appended Submittal Review cover sheet.
- D. Architect/Engineer's and consultants' actions on items submitted for review:
  - 1. Authorizing purchasing, fabrication, delivery, and installation:
    - a. "No Exception Taken", or language with same legal meaning.
      - 1) Resubmission is not required or requested.
      - 2) Resubmitted items will not be acknowledged.
    - b. "Make Corrections Noted", or language with same legal meaning.
      - 1) Resubmission is not required or requested.
      - 2) Resubmitted items may be returned marked "Not Requested, Not Reviewed".
  - 2. Not Authorizing fabrication, delivery, and installation:
    - a. "Revise and Resubmit".
      - 1) Resubmit revised item, with review notations acknowledged and incorporated.
      - 2) Clearly identify all revisions.
      - 3) Non-responsive resubmittals may be rejected.
    - b. "Rejected".
      - 1) Submit item complying with requirements of Contract Documents.
    - c. "Submit Specified Item".
      - 1) Submit item complying with requirements of Contract Documents.

**END OF SECTION**

---

## ELECTRONIC DATA TRANSFER CONSENT FORM

Project Name: PUBLIC WORKS HVAC IMPROVEMENTS  
201 S. BOULEVARD  
OAK PARK, ILLINOIS 60302

Project No.: 24-475-1536

Owner: VILLAGE OF OAK PARK

Your Work: \_\_\_\_\_

KLUBER, INC. (hereinafter referred to as "Kluber") an Illinois corporation, is providing electronic data to you solely at your request and for your convenience. By accepting and opening any of the electronic data files, you agree that Kluber bears no liability for the data or its transmission to you and that you are solely liable for any and all claims referring or relating to any and all products you, or your Subcontractors, may generate with the data.

You acknowledge that you have a limited non-exclusive license to use the information solely in connection with your work on the project captioned above, and that Kluber retains all rights, including copyright, to the data.

Acknowledged by: \_\_\_\_\_  
(Printed Name) (Signature)

Company: \_\_\_\_\_

Date: \_\_\_\_\_ Email: \_\_\_\_\_

Architectural Floor Plans are transmitted for the contractors' use as backgrounds for shop drawings and as-built drawings, and, as such, contain graphic information for column grid, walls, floors, stairs, doors, windows, room numbers, ceiling grid, lights, diffusers and sprinkler heads where indicated on Bid Documents. Plans do not contain title blocks, keynotes, schedules, mechanical ductwork and equipment, electrical device symbols, circuit numbers and home runs, plumbing equipment, piping runs and riser diagrams, and architectural/engineering text and details. Plans depict entire floors and are not formatted, partial plans as depicted in the Bidding Documents. Files are provided in R2013 .DWG format.)



**SECTION 01 40 00  
QUALITY REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Submittals.
- B. Control of installation.
- C. Tolerances.
- D. Defect Assessment.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 41 00 - Regulatory Requirements.
- B. Section 01 42 00 - References.
- C. Section 01 60 00 - Product Requirements: Requirements for material and product quality.

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Certificates: When specified in individual specification sections, submit certification by the manufacturer and Contractor or installation/application subcontractor to Architect/Engineer, in quantities specified for Product Data.
  - 1. Indicate material or product complies with or exceeds specified requirements. Submit supporting reference data, affidavits, and certifications as appropriate.
  - 2. Certificates may be recent or previous test results on material or product, but must be acceptable to Architect/Engineer.
- C. Manufacturer's Instructions: When specified in individual specification sections, submit printed instructions for delivery, storage, assembly, installation, start-up, adjusting, and finishing, for the Owner's information. Indicate special procedures, perimeter conditions requiring special attention, and special environmental criteria required for application or installation.

**1.04 REGULATORY REQUIREMENTS - SEE SECTION 01 41 00**

**1.05 REFERENCES AND STANDARDS - SEE SECTION 01 42 00**

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION**

**3.01 CONTROL OF INSTALLATION**

- A. Monitor quality control over suppliers, manufacturers, products, services, site conditions, and workmanship, to produce work of specified quality.
- B. Comply with manufacturers' instructions, including each step in sequence.
- C. Should manufacturers' instructions conflict with Contract Documents, request clarification from Architect/Engineer before proceeding.

- D. Comply with specified standards as minimum quality for the work except where more stringent tolerances, codes, or specified requirements indicate higher standards or more precise workmanship.
- E. Have work performed by persons qualified to produce required and specified quality.
- F. Verify that field measurements are as indicated on shop drawings or as instructed by the manufacturer.
- G. Secure products in place with positive anchorage devices designed and sized to withstand stresses, vibration, physical distortion, and disfigurement.

### **3.02 TOLERANCES**

- A. Monitor fabrication and installation tolerance control of products to produce acceptable Work. Do not permit tolerances to accumulate.
- B. Comply with manufacturers' tolerances. Should manufacturers' tolerances conflict with Contract Documents, request clarification from Architect/Engineer before proceeding.
- C. Adjust products to appropriate dimensions; position before securing products in place.

### **3.03 DEFECT ASSESSMENT**

- A. Replace Work or portions of the Work not complying with specified requirements.
- B. If, in the opinion of Owner, it is not practical to remove and replace the work, Owner will direct an appropriate remedy or adjust payment.

**END OF SECTION**

**SECTION 01 41 00  
REGULATORY REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. General.
- B. Definitions.
- C. Quality Assurance.
- D. Regulatory Requirements.

**1.02 RELATED SECTIONS**

- A. Section 01 10 00 - Summary.
- B. Section 01 42 00 - References.

**1.03 GENERAL**

- A. Comply with all applicable laws, rules, regulations, codes and ordinances.
- B. If the Contractor observes that the Contract Documents may be at variance with specified codes, notify the Architect/Engineer immediately. Architect/Engineer shall issue all changes in accordance with the General Conditions.
- C. It shall not be the Contractor's primary responsibility to make certain that the Contract Documents are in accordance with all applicable laws, rules and regulations, however, when the Contractor performs work knowing or having reason to know that the work in question is contrary to applicable laws, rules, and regulations, and fails to notify the Architect/Engineer, the Contractor shall pay all costs arising therefrom.

**1.04 DEFINITIONS**

- A. Definitions:
  - 1. Codes: Codes are statutory requirements, rules or regulations of governmental entities.
  - 2. Standards: Standards are requirements that have been established as accepted criteria, set general consent.

**1.05 QUALITY ASSURANCE**

- A. The Architect/Engineer has designed the project to applicable code requirements and has copies of said codes available for the Contractor's inspection.
- B. The Contractor shall:
  - 1. Ensure that copies of codes and standards referenced herein or specified in individual specifications sections are available to Contractor's personnel, agents, and Sub-Contractors.
  - 2. Ensure that Contractor's personnel, agents, and Sub-Contractors are familiar with the workmanship and requirements of applicable codes and standards.

**1.06 REGULATORY REQUIREMENTS**

- A. Source and Requirements: Verify amendments with local code officials.
  - 1. Local code requirements:

- a. ICC International Building Code, 2021 Edition.
  - b. ICC International Mechanical Code, 2021 Edition.
  - c. ICC International Fire Code, 2021 Edition.
  - d. ICC International Property Maintenance Code, 2021 Edition.
  - e. National Electrical Code, 2021 Edition.
2. State code requirements:
- a. Capital Development Board (CDB):
    - 1) Illinois Accessibility Code, 2018 Edition.
    - 2) Illinois Energy Conservation Code (ICC International Energy Conservation Code, 2021 Edition, with State of Illinois modifications.
  - b. Illinois Department of Labor (IDOL): Safety Glazing Materials Act - Illinois Revised Statutes, chap. 111 1/2, paragraph 3101, et seq.
  - c. Illinois Department of Public Health (IDPH):
    - 1) Illinois Plumbing Code (Illinois Administrative Code, Title 77, Chapter I, Subchapter r, Part 890).
  - d. Illinois Environmental Protection Agency (IEPA):
    - 1) Air-Pollution Standards.
    - 2) Noise Pollution Standards.
    - 3) Water Pollution Standards.
    - 4) Public Water Supplies
    - 5) Solid Waste Standards.
    - 6) Illinois Recommended Standards for Sewage Works (Illinois Administrative Code, Title 35, Subtitle C, Chapter II, Part 370).
  - e. Office of the Illinois State Fire Marshal (OSFM):
    - 1) Boiler & Pressure Vessel Safety Code (Illinois Administrative Code, Title 44, Chapter I, Part 120).
    - 2) Illinois Elevator Safety Rules (Illinois Administrative Code, Title 41, Chapter II, Part 1000).
      - a) ASME A17.1 - Safety Code For Elevators and Escalators, 2019 Edition.
    - 3) Illinois Rules & Regulations for Fire Prevention & Safety (as amended).
    - 4) Gasoline and Volatile Oils (Illinois Revised Statutes, chap. 17 1/2, paragraph 31, et seq.).
3. Information and Requirements for Utility Services: Local utility companies.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

**SECTION 01 42 00  
REFERENCES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Drawing symbols, abbreviations and acronyms.
- B. Definitions of terms used throughout the Contract Documents.
- C. Explanation of specification format and content.
- D. Requirements relating to referenced standards.
- E. Applicability of referenced standards.
- F. List of industry organizations and certain of their respective documents.

**1.02 DRAWING SYMBOLS AND CONVENTIONS**

- A. Abbreviations and graphic symbols are defined on the General Notes, Symbols & Abbreviations sheet of the drawings.
- B. Generally, symbols used on the mechanical and electrical drawings conform to those recommended by ASHRAE, though, where appropriate, these symbols are supplemented by more specific symbols as recommended by ASME, ASPE, or the IEEE.

**1.03 DEFINITIONS**

- A. Where the terms "indicated", "noted", "scheduled", "shown", or "specified" are used it is to help locate the reference; no limitation on location is intended except as specifically noted.
- B. Where the terms "directed", "requested", "authorized", "approved", are used as in "directed by the Architect/Engineer", no implied meaning shall be construed to extend the Architect/Engineer's responsibilities into the Contractor's purview of construction supervision.
- C. Where the term "approved" is used in conjunction with the Architect/Engineer's action on submittals, requests or applications it is limited to the duties of the Architect/Engineer as described in the Agreement, and the General and Supplemental Conditions of the Contract. Such use of the term "approval" shall not limit or release the Contractor from his responsibility to fulfill Contract requirements.
- D. Where the term "regulations" is used it means all applicable statutes, laws, ordinances, and orders issued by authorities having jurisdiction, as well as construction industry standards, rules, or conventions that address performance of the Work.
- E. The "Project Site" is the space available to the Contractor for performance of construction activities. The Project Site may be for the exclusive use of the Contractor and his activities or may be used in conjunction with others performing other construction or related activities on the Project. Unless the extent of the Project Site is indicated on the Drawings, means the limits of the area within the property line of the parcel on which the Project is located, subject to the limitations and restrictions of local ordinance and the discretion of the Owner.

- F. Where the term "furnish" is used it means supply, deliver to, and unload and store at the Project Site until the Work is ready for the item to be assembled and incorporated into the Work.
- G. Where the term "install" is used it is meant to describe operations at the Project Site to include uncrating, assembling, placing, anchoring, connecting to utilities, finishing, protecting, cleaning and all other similar operations required to fully incorporate an item into the Work.
- H. Where the term "provide" is used it means "furnish and install" as defined above.
- I. Where the term "refurbish" is used it means refinish, repair and otherwise restore to like-new condition.
- J. Where the terms "remove" or "demolish" are used they mean safely disconnect from existing utilities, permanently extract from the Work and the Project Site, and legally dispose of off-site.
- K. Where the terms "temporarily remove" or "salvage" are used they mean safely disconnect from existing utilities and carefully extract from the Work so as to prevent damage to the item and the Work.
  - 1. If the item is to be reinstalled or relocated as part of the Work, these terms also mean clean, adjust, lubricate and otherwise restore to best possible condition without repair or refinishing.
  - 2. Otherwise, these terms also mean clean item surfaces and turn over to the Owner for storage and possible future use.
- L. Where the term "reinstall" is used it means the same as "install", with respect to a temporarily removed, salvaged or relocated item.
- M. Where the term "relocate" is used it means temporarily remove and reinstall in a new location.
- N. Where the phrase "salvage in place" is used it means protect in place so as to prevent damage while adjacent elements are demolished, restore to best possible condition without repair or refinishing, and modify as necessary to properly incorporate and integrate with the Work.

#### **1.04 SPECIFICATION FORMAT AND CONTENT**

- A. These Specifications are based on the Construction Specification Institute's 49 Division format and numbering system.
- B. Language used in the Specifications and other Contract Documents is an abbreviated type. Implied words and meanings will appropriately interpreted.
- C. Requirements expressed in imperative and streamlined language are to be performed by the Contractor. At certain locations in the text, subjective language may be used to describe responsibilities that must be fulfilled indirectly by the Contractor or others.
  - 1. Whenever a colon (:) is used within a sentence or phrase, it shall be construed to mean the words "shall be".
- D. Use of certain terms such as "carpentry" is not intended to imply that certain activities must be performed by accredited or unionized individuals of a corresponding generic name. The Specifications do, however, require that certain construction activities shall be performed by specialists who are recognized experts in the operations to be performed. Specialists shall be used for said activities, however the final responsibility for fulfilling the requirements of the Contract remains the Contractor's.

## **1.05 QUALITY ASSURANCE**

- A. For products or workmanship specified by reference to a document or documents not included in the Project Manual, also referred to as reference standards, comply with requirements of the standard, except when more rigid requirements are specified or are required by applicable codes.
- B. Conform to reference standard of date of issue specified in this section, except where a specific date is established by applicable code.
- C. Obtain copies of standards when required by the Contract Documents.
- D. Maintain copy at project site during submittals, planning, and progress of the specific work, until Substantial Completion.
- E. Should specified reference standards conflict with Contract Documents, request clarification from the Architect/Engineer before proceeding.
- F. Neither the contractual relationships, duties, or responsibilities of the parties in Contract nor those of the Architect/Engineer shall be altered by the Contract Documents by mention or inference otherwise in any reference document.

## **1.06 APPLICABILITY OF INDUSTRY STANDARDS**

- A. Construction industry standards shall have the same force and effect as if bound or copied directly in the Contract Documents, except where more stringent requirements are specified. All such applicable standards are made a part of the Contract Documents by reference.
  - 1. Where compliance with two or more standards are referenced and conflicting requirements for quality or quantities occur, comply with the more stringent requirements. Refer questions regarding apparently conflicting standards to the Architect/Engineer for a decision before proceeding.
  - 2. The standard of quality or quantity levels specified, shown, or referenced shall be the minimum to be provided or performed. Refer questions regarding standards of minimum quality or quantity to the Architect/Engineer before proceeding.

## **1.07 CONSTRUCTION INDUSTRY ORGANIZATIONS AND DOCUMENTS**

AA -- ALUMINUM ASSOCIATION, INC.

AABC -- ASSOCIATED AIR BALANCE COUNCIL

AAMA -- AMERICAN ARCHITECTURAL MANUFACTURERS ASSOCIATION

AASHTO -- AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS

ACI -- AMERICAN CONCRETE INSTITUTE INTERNATIONAL

AISC -- AMERICAN INSTITUTE OF STEEL CONSTRUCTION, INC.

ANSI -- AMERICAN NATIONAL STANDARDS INSTITUTE

ASHRAE -- AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS, INC.

ASME -- THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

ASTM -- AMERICAN SOCIETY FOR TESTING AND MATERIALS  
AWI -- ARCHITECTURAL WOODWORK INSTITUTE  
AWPA -- AMERICAN WOOD-PRESERVERS' ASSOCIATION  
AWS -- AMERICAN WELDING SOCIETY  
BHMA -- BUILDERS HARDWARE MANUFACTURERS ASSOCIATION  
BIA -- BRICK INDUSTRY ASSOCIATION  
CPSC -- CONSUMER PRODUCTS SAFETY COMMISSION  
DHI -- DOOR AND HARDWARE INSTITUTE  
DIN -- DEUTSCHES INSTITUT FUR NORMUNG  
FM -- FACTORY MUTUAL RESEARCH CORPORATION  
ICC -- INTERNATIONAL CODE COUNCIL, INC.  
IEEE -- INSTITUTE OF ELECTRICAL AND ELECTRONIC ENGINEERS  
ISO -- INTERNATIONAL STANDARDS ORGANIZATION  
MFMA -- MAPLE FLOORING MANUFACTURERS ASSOCIATION  
NAAMM -- THE NATIONAL ASSOCIATION OF ARCHITECTURAL METAL MANUFACTURERS  
NCMA -- NATIONAL CONCRETE MASONRY ASSOCIATION  
NEBB -- NATIONAL ENVIRONMENTAL BALANCING BUREAU  
NEMA -- NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION  
NFPA -- NATIONAL FIRE PROTECTION ASSOCIATION  
NRCA -- NATIONAL ROOFING CONTRACTORS ASSOCIATION  
PCI -- PRECAST/PRESTRESSED CONCRETE INSTITUTE  
SDI -- STEEL DOOR INSTITUTE  
SDI -- STEEL DECK INSTITUTE, INC.  
SGCC -- SAFETY GLAZING CERTIFICATION COUNCIL  
SIGMA - SEALED INSULATING GLASS MANUFACTURERS ASSOCIATION (See IGMA)  
SJI -- STEEL JOIST INSTITUTE  
SMACNA -- SHEET METAL AND AIR CONDITIONING CONTRACTORS' NATIONAL ASSOCIATION, INC.  
SSPC -- THE SOCIETY FOR PROTECTIVE COATINGS  
TCA -- TILE COUNCIL OF AMERICA, INC.  
UL -- UNDERWRITERS LABORATORIES INC.



WWPA -- WESTERN WOOD PRODUCTS ASSOCIATION

**1.08 UNITED STATES GOVERNMENT AND RELATED AGENCIES/DOCUMENTS**

CFR -- CODE OF FEDERAL REGULATIONS

CPSC -- CONSUMER PRODUCTS SAFETY COMMISSION

EPA -- ENVIRONMENTAL PROTECTION AGENCY

FS -- FEDERAL SPECIFICATIONS AND STANDARDS (General Services Administration)

GSA -- U.S. GENERAL SERVICES ADMINISTRATION

USGS -- UNITED STATES GEOLOGICAL SURVEY

**1.09 STATE GOVERNMENT AND RELATED AGENCIES/DOCUMENTS**

CDB -- ILLINOIS CAPITAL DEVELOPMENT BOARD

IDOL -- ILLINOIS DEPARTMENT OF LABOR

IDPH -- ILLINOIS DEPARTMENT OF PUBLIC HEALTH

IEPA -- ILLINOIS ENVIRONMENTAL PROTECTION AGENCY

OSFM -- OFFICE OF THE ILLINOIS STATE FIRE MARSHAL

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION - NOT USED**

**END OF SECTION**

**SECTION 01 50 00  
TEMPORARY FACILITIES AND CONTROLS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Temporary telecommunications services.
- B. Temporary sanitary facilities.
- C. Temporary controls: Barriers, enclosures, and fencing.
- D. Security requirements.
- E. Vehicular access and parking.
- F. Waste removal facilities and services.

**1.02 TEMPORARY UTILITIES**

- A. Owner will provide the following:
  - 1. Electrical power and metering, consisting of connection to existing facilities.
  - 2. Water supply, consisting of connection to existing facilities.

**1.03 TELECOMMUNICATIONS SERVICES**

- A. Provide, maintain, and pay for telecommunications services to field office at time of project mobilization.
- B. Telecommunications services shall include:
  - 1. One (1) mobile cellular telephone for each of Contractor's and any Subcontractor's field personnel.

**1.04 TEMPORARY SANITARY FACILITIES**

- A. Use of existing facilities is permitted. Coordinate with Owner for specific facilities that will be available for Contractor use.
- B. Maintain daily in clean and sanitary condition.

**1.05 BARRIERS**

- A. Provide barriers to prevent unauthorized entry to construction areas, to prevent access to areas that could be hazardous to workers or the public, to allow for owner's use of site and to protect existing facilities and adjacent properties from damage from construction operations and demolition.
- B. Provide barricades and covered walkways required by governing authorities for public rights-of-way and for public access to existing building.
- C. Protect non-owned vehicular traffic, stored materials, site, and structures from damage.

**1.06 SECURITY**

- A. Provide security and facilities to protect Work, existing facilities, and Owner's operations from unauthorized entry, vandalism, or theft.

B. Coordinate with Owner on required security requirements.

### **1.07 VEHICULAR ACCESS AND PARKING**

- A. Comply with regulations relating to use of streets and sidewalks, access to emergency facilities, and access for emergency vehicles.
- B. Coordinate access and haul routes with governing authorities and Owner.
- C. Provide and maintain access to fire hydrants, free of obstructions.
- D. Provide means of removing mud from vehicle wheels before entering streets.
- E. Provide temporary parking areas to accommodate construction personnel. When site space is not adequate, provide additional off-site parking.

Existing parking areas may be used for construction parking.

### **1.08 WASTE REMOVAL**

- A. Provide waste removal facilities and services as required to maintain the site in clean and orderly condition.
- B. Provide containers with lids. Remove trash from site periodically.
- C. If materials to be recycled or re-used on the project must be stored on-site, provide suitable non-combustible containers; locate containers holding flammable material outside the structure unless otherwise approved by the authorities having jurisdiction.
- D. Open free-fall chutes are not permitted. Terminate closed chutes into appropriate containers with lids.

### **1.09 REMOVAL OF UTILITIES, FACILITIES, AND CONTROLS**

- A. Remove temporary utilities, equipment, facilities, materials, prior to Date of Substantial Completion inspection.
- B. Clean and repair damage caused by installation or use of temporary work.
- C. Restore existing facilities used during construction to original condition.

## **PART 2 PRODUCTS - NOT USED**

## **PART 3 EXECUTION - NOT USED**

**END OF SECTION**

**SECTION 01 60 00  
PRODUCT REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. General product requirements.
- B. Transportation, handling, storage and protection.
- C. Product option requirements.
- D. Substitution limitations.
- E. Procedures for Owner-supplied products.
- F. Maintenance materials, including extra materials, spare parts, tools, and software.

**1.02 SUBMITTALS**

- A. Product Data Submittals: Submit manufacturer's standard published data. Mark each copy to identify applicable products, models, options, and other data. Supplement manufacturers' standard data to provide information specific to this Project.
- B. Shop Drawing Submittals: Prepared specifically for this Project; indicate utility and electrical characteristics, utility connection requirements, and location of utility outlets for service for functional equipment and appliances.
- C. Sample Submittals: Illustrate functional and aesthetic characteristics of the product, with integral parts and attachment devices. Coordinate sample submittals for interfacing work.
  - 1. For selection from standard finishes, submit samples of the full range of the manufacturer's standard colors, textures, and patterns.

**1.03 QUALITY ASSURANCE**

- A. Environmental Product Declaration (EPD): Publicly available, critically reviewed life cycle analysis having at least a cradle-to-gate scope.
  - 1. Good: Product-specific; compliant with ISO 14044.
  - 2. Better: Industry-wide, generic; compliant with ISO 21930, or with ISO 14044, ISO 14040, ISO 14025, and EN 15804; Type III third-party certification with external verification, in which the manufacturer is recognized as the program operator.
  - 3. Best: Commercial-product-specific; compliant with ISO 21930, or with ISO 14044, ISO 14040, ISO 14025, and EN 15804; Type III third-party certification with external verification, in which the manufacturer is recognized as the program operator.
  - 4. Where demonstration of impact reduction below industry average is required, submit both industry-wide and commercial-product-specific declarations; or submit at least 5 declarations for products of the same type by other manufacturers in the same industry.
- B. Health Product Declarations (HPD): Complete, published declaration with full disclosure of known hazards, prepared using one of the HPDC (HPD-OLT) online tools.

## **PART 2 PRODUCTS**

### **2.01 NEW PRODUCTS**

- A. Provide new products unless specifically required or permitted by Contract Documents.
- B. Designed, manufactured, and tested in accordance with industry standards.
- C. Where other criteria are met, Contractor shall give preference to products that:
  - 1. If used on interior, have lower emissions.
  - 2. If wet-applied, have lower VOC content.
  - 3. Are extracted, harvested, and/or manufactured closer to the location of the project.
  - 4. Have longer documented life span under normal use.
  - 5. Result in less construction waste.
  - 6. Are made of recycled materials.
  - 7. Have a published Environmental Product Declaration (EPD).
  - 8. Have a published Health Product Declaration (HPD).
  - 9. Have a published Manufacturer's Inventory of Chemical Content.

### **2.02 PRODUCT OPTIONS**

- A. Products Specified by Reference Standards or by Description Only: Use any product meeting those standards or description.
- B. Products Specified by Naming One or More Manufacturers: Use a product of one of the manufacturers named and meeting specifications, no options or substitutions allowed.
- C. Products Specified by Naming One or More Manufacturers with a Provision for Substitutions: Submit a request for substitution for any manufacturer not named.

### **2.03 MAINTENANCE MATERIALS**

- A. Furnish extra materials, spare parts, tools, and software of types and in quantities specified in individual specification sections.
- B. Deliver to Project site and place in location directed by Owner's representative; obtain Owner's signature on receipt for delivery prior to final payment. Submit signed receipts with Closeout Submittals.

## **PART 3 EXECUTION**

### **3.01 SUBSTITUTION LIMITATIONS**

- A. Substitutions Prior To Bid Opening: Architect/Engineer will consider a written request for substitution provided that such request is received at least seven (7) days prior to the Bid opening date. Requests received after that time will not be considered.
  - 1. Only Substitution Requests from Bidders will be considered.
  - 2. If a request is approved, the Architect/Engineer will issue and appropriate addendum not less than three (3) days prior to the Bid opening date.
- B. Substitutions After Notice of Award: Architect/Engineer will consider a request for substitution only from the Contractor and only under one or more of the following conditions:
  - 1. Substitution is required for compliance with final interpretation of code requirements or insurance regulations.

2. Specified product is not available through no fault of the Contractor.
  3. Specified product is not compatible with other specified materials/equipment.
  4. Manufacturer will not certify or warranty specified product as required.
- C. Document each request utilizing Substitution Request Form following this section with complete data substantiating compliance of proposed substitution with Contract Documents. Incomplete requests will not be considered. Submit a separate Substitution Request Form and accompanying documentation for each proposed substitution.
- D. Provide the following minimum documentation with each Substitution Request Form:
1. Product identification, manufacturer, product data including dimensions and weight, performance and installation instructions.
  2. Side-by-side itemized comparison of proposed substitution with specified product.
  3. Coordination information including other modifications required as a result of proposed substitution.
  4. Cost information including the effect of the proposed substitution on the Contract Sum.
- E. Sign and date the Substitution Request Form.
- F. A request for substitution constitutes a representation that the submitter:
1. Has investigated proposed product and determined that it meets or exceeds the quality level of the specified product.
  2. Agrees to provide the same warranty for the substitution as for the specified product.
  3. Agrees to coordinate installation and make changes to other Work that may be required for the Work to be complete with no additional cost to Owner.
  4. Waives claims for additional costs or time extension that may subsequently become apparent.
  5. Agrees to reimburse Owner and Architect/Engineer for review or redesign services associated with re-approval by authorities having jurisdiction over the Project.
- G. Architect/Engineer will notify submitter in writing of decision to accept or reject request.
- H. Substitutions of products or product characteristics/components/options/accessories will not be considered when they are indicated or implied on Contractor's submittals, without separate written request, or when acceptance will require revision to the Contract Documents, whether rejection of said substitutions is expressly identified by Architect/Engineer on Contractor's submittals or not.

### **3.02 TRANSPORTATION AND HANDLING**

- A. Package products for shipment in manner to prevent damage; for equipment, package to avoid loss of factory calibration.
- B. If special precautions are required, attach instructions prominently and legibly on outside of packaging.
- C. Coordinate schedule of product delivery to designated prepared areas in order to minimize site storage time and potential damage to stored materials.
- D. Transport and handle products in accordance with manufacturer's instructions.
- E. Transport materials in covered trucks to prevent contamination of product and littering of surrounding areas.

- F. Promptly inspect shipments to ensure that products comply with requirements, quantities are correct, and products are undamaged.
- G. Provide equipment and personnel to handle products by methods to prevent soiling, disfigurement, or damage, and to minimize handling.
- H. Arrange for the return of packing materials, such as wood pallets, where economically feasible.

### **3.03 STORAGE AND PROTECTION**

- A. Designate receiving/storage areas for incoming products so that they are delivered according to installation schedule and placed convenient to work area in order to minimize waste due to excessive materials handling and misapplication.
- B. Store and protect products in accordance with manufacturers' instructions.
- C. Store with seals and labels intact and legible.
- D. Store sensitive products in weathertight, climate-controlled enclosures in an environment favorable to product.
- E. For exterior storage of fabricated products, place on sloped supports above ground.
- F. Protect products from damage or deterioration due to construction operations, weather, precipitation, humidity, temperature, sunlight and ultraviolet light, dirt, dust, and other contaminants.
- G. Comply with manufacturer's warranty conditions, if any.
- H. Cover products subject to deterioration with impervious sheet covering. Provide ventilation to prevent condensation and degradation of products.
- I. Prevent contact with material that may cause corrosion, discoloration, or staining.
- J. Provide equipment and personnel to store products by methods to prevent soiling, disfigurement, or damage.
- K. Arrange storage of products to permit access for inspection. Periodically inspect to verify products are undamaged and are maintained in acceptable condition.

**END OF SECTION**

## SUBSTITUTION REQUEST FORM

PROJECT: PUBLIC WORKS HVAC IMPROVEMENTS

SPECIFIED ITEM: \_\_\_\_\_

Specification Section	Page	Paragraph	Description
-----------------------	------	-----------	-------------

The undersigned requests consideration of the following:

PROPOSED SUBSTITUTION: \_\_\_\_\_

Attached data includes project description, specifications, drawings, photographs, performance and test data adequate for evaluation of the request; applicable portions of the data are clearly identified.

Attached data also includes a description of changes to the Contract Documents which the proposed substitution will require for its proper installation.

The undersigned certifies that the following paragraphs, unless modified by attachments, are correct:

1. The proposed substitution does not affect dimensions shown on drawings.
2. The undersigned will pay for changes to the building design, including engineering design, detailing, and construction costs caused by the requested substitution.
3. The proposed substitution will have no adverse effect on other trades, the construction schedule, or specified warranty requirements.
4. Maintenance and service parts will be locally available for the proposed substitution.

The undersigned further states that the function, appearance, and quality of the proposed substitution are equivalent or superior to the specified item.

\_\_\_\_\_  
Printed Name

\_\_\_\_\_  
Signature

\_\_\_\_\_  
Date

\_\_\_\_\_  
Firm

\_\_\_\_\_  
Telephone

\_\_\_\_\_  
Email

Attachments (list): \_\_\_\_\_

For Use By The Architect/Engineer:

Accepted       Accepted As Noted

Not Accepted       Received Too Late

By: \_\_\_\_\_

Date: \_\_\_\_\_

Remarks: \_\_\_\_\_



**SECTION 01 70 00  
EXECUTION AND CLOSEOUT REQUIREMENTS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Examination, preparation, and general installation procedures.
- B. Pre-installation meetings.
- C. Cutting and patching.
- D. Cleaning and protection.
- E. Demonstration and instruction of Owner personnel.
- F. Closeout procedures, including Contractor's Correction Punch List, except payment procedures.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 30 00 - Administrative Requirements: Submittals procedures, Electronic document submittal service.
- B. Section 01 40 00 - Quality Requirements: Testing and inspection procedures.
- C. Section 01 50 00 - Temporary Facilities and Controls
- D. Section 01 78 00 - Closeout Submittals: Project record documents, operation and maintenance data, warranties, and bonds.

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.

**1.04 PROJECT CONDITIONS**

- A. Ventilate enclosed areas to assist cure of materials, to dissipate humidity, and to prevent accumulation of dust, fumes, vapors, or gases.
- B. Dust Control: Execute work by methods to minimize raising dust from construction operations. Provide positive means to prevent air-borne dust from dispersing into atmosphere and over adjacent property.
  - 1. Provide dust-proof barriers between construction areas and areas continuing to be occupied by Owner.
- C. Noise Control: Provide methods, means, and facilities to minimize noise produced by construction operations.
- D. Pest and Rodent Control: Provide methods, means, and facilities to prevent pests and insects from damaging the work.
- E. Rodent Control: Provide methods, means, and facilities to prevent rodents from accessing or invading premises.
- F. Pollution Control: Provide methods, means, and facilities to prevent contamination of soil, water, and atmosphere from discharge of noxious, toxic substances, and pollutants produced by

construction operations. Comply with federal, state, and local regulations.

## **1.05 COORDINATION**

- A. Coordinate scheduling, submittals, and work of the various sections of the Project Manual to ensure efficient and orderly sequence of installation of interdependent construction elements, with provisions for accommodating items installed later.
- B. Notify affected utility companies and comply with their requirements.
- C. Verify that utility requirements and characteristics of new operating equipment are compatible with building utilities. Coordinate work of various sections having interdependent responsibilities for installing, connecting to, and placing in service, such equipment.
- D. Coordinate space requirements, supports, and installation of mechanical and electrical work that are indicated diagrammatically on Drawings. Follow routing shown for pipes, ducts, and conduit, as closely as practicable; place runs parallel with lines of building. Utilize spaces efficiently to maximize accessibility for other installations, for maintenance, and for repairs.
- E. In finished areas except as otherwise indicated, conceal pipes, ducts, and wiring within the construction. Coordinate locations of fixtures and outlets with finish elements.
- F. Coordinate completion and clean-up of work of separate sections.
- G. After Owner occupancy of premises, coordinate access to site for correction of defective work and work not in accordance with Contract Documents, to minimize disruption of Owner's activities.

## **PART 2 PRODUCTS**

### **2.01 PATCHING MATERIALS**

- A. New Materials: As specified in product sections; match existing products and work for patching and extending work.
- B. Type and Quality of Existing Products: Determine by inspecting and testing products where necessary, referring to existing work as a standard.
- C. Product Substitution: For any proposed change in materials, submit request for substitution described in Section 01 60 00 - Product Requirements.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that existing site conditions and substrate surfaces are acceptable for subsequent work. Start of work means acceptance of existing conditions.
- B. Verify that existing substrate is capable of structural support or attachment of new work being applied or attached.
- C. Examine and verify specific conditions described in individual specification sections.
- D. Take field measurements before confirming product orders or beginning fabrication, to minimize waste due to over-ordering or misfabrication.
- E. Verify that utility services are available, of the correct characteristics, and in the correct locations.

- F. Prior to Cutting: Examine existing conditions prior to commencing work, including elements subject to damage or movement during cutting and patching. After uncovering existing work, assess conditions affecting performance of work. Beginning of cutting or patching means acceptance of existing conditions.

### **3.02 PREPARATION**

- A. Clean substrate surfaces prior to applying next material or substance.
- B. Seal cracks or openings of substrate prior to applying next material or substance.
- C. Apply manufacturer required or recommended substrate primer, sealer, or conditioner prior to applying any new material or substance in contact or bond.

### **3.03 PREINSTALLATION MEETINGS**

- A. When required in individual specification sections, convene a preinstallation meeting at the site prior to commencing work of the section.
- B. Require attendance of parties directly affecting, or affected by, work of the specific section.
- C. Notify Architect/Engineer four days in advance of meeting date.
- D. Prepare agenda and preside at meeting:
  - 1. Review conditions of examination, preparation and installation procedures.
  - 2. Review coordination with related work.
- E. Record minutes and distribute copies within two days after meeting to participants, with two copies to Architect/Engineer, Owner, participants, and those affected by decisions made.

### **3.04 GENERAL INSTALLATION REQUIREMENTS**

- A. Install products as specified in individual sections, in accordance with manufacturer's instructions and recommendations, and so as to avoid waste due to necessity for replacement.
- B. Make vertical elements plumb and horizontal elements level, unless otherwise indicated.
- C. Install equipment and fittings plumb and level, neatly aligned with adjacent vertical and horizontal lines, unless otherwise indicated.
- D. Make consistent texture on surfaces, with seamless transitions, unless otherwise indicated.
- E. Make neat transitions between different surfaces, maintaining texture and appearance.

### **3.05 CUTTING AND PATCHING**

- A. Whenever possible, execute the work by methods that avoid cutting or patching.
- B. Perform whatever cutting and patching is necessary to:
  - 1. Complete the work.
  - 2. Fit products together to integrate with other work.
  - 3. Provide openings for penetration of mechanical, electrical, and other services.
  - 4. Match work that has been cut to adjacent work.
  - 5. Repair areas adjacent to cuts to required condition.
  - 6. Repair new work damaged by subsequent work.
  - 7. Remove samples of installed work for testing when requested.

- 8. Remove and replace defective and non-complying work.
- C. Execute work by methods that avoid damage to other work and that will provide appropriate surfaces to receive patching and finishing. In existing work, minimize damage and restore to original condition.
- D. Employ original installer to perform cutting for weather exposed and moisture resistant elements, and sight exposed surfaces.
- E. Cut rigid materials using masonry saw or core drill. Pneumatic tools not allowed without prior approval.
- F. Restore work with new products in accordance with requirements of Contract Documents.
- G. Fit work air tight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces.
- H. At penetrations of fire rated walls, partitions, ceiling, or floor construction, completely seal voids with fire rated material , to full thickness of the penetrated element.
- I. Patching:
  - 1. Finish patched surfaces to match finish that existed prior to patching. On continuous surfaces, refinish to nearest intersection or natural break. For an assembly, refinish entire unit.
  - 2. Match color, texture, and appearance.
  - 3. Repair patched surfaces that are damaged, lifted, discolored, or showing other imperfections due to patching work. If defects are due to condition of substrate, repair substrate prior to repairing finish.

### **3.06 PROGRESS CLEANING**

- A. Maintain areas free of waste materials, debris, and rubbish. Maintain site in a clean and orderly condition.
- B. Remove debris and rubbish from closed or remote spaces, prior to enclosing the space.
- C. Broom and vacuum clean interior areas prior to start of surface finishing, and continue cleaning to eliminate dust.
- D. Collect and remove waste materials, debris, and trash/rubbish from site periodically and dispose off-site; do not burn or bury.

### **3.07 PROTECTION OF INSTALLED WORK**

- A. Protect installed work from damage by construction operations.
- B. Provide special protection where specified in individual specification sections.
- C. Provide temporary and removable protection for installed products. Control activity in immediate work area to prevent damage.
- D. Protect finished floors, stairs, and other surfaces from traffic, dirt, wear, damage, or movement of heavy objects, by protecting with durable sheet materials.
- E. Remove protective coverings when no longer needed; reuse or recycle coverings if possible.

### **3.08 FINAL CLEANING**

- A. Execute final cleaning prior to final project assessment.
  - 1. Clean areas to be occupied by Owner prior to final completion before Owner occupancy.
- B. Use cleaning materials that are nonhazardous.
- C. Clean equipment and fixtures to a sanitary condition with cleaning materials appropriate to the surface and material being cleaned.
- D. Clean site; sweep paved areas.
- E. Remove waste, surplus materials, trash/rubbish, and construction facilities from the site; dispose of in legal manner; do not burn or bury.

### **3.09 CLOSEOUT PROCEDURES**

- A. See Section 01 77 00 for additional requirements.
- B. Make submittals that are required by governing or other authorities.
- C. Accompany Project Coordinator on preliminary inspection to determine items to be listed for completion or correction in the Contractor's Correction Punch List for Contractor's Notice of Substantial Completion.
- D. Notify Architect/Engineer when work is considered ready for Architect/Engineer's Substantial Completion inspection.
- E. Submit written certification containing Contractor's Correction Punch List, that Contract Documents have been reviewed, work has been inspected, and that work is complete in accordance with Contract Documents and ready for Architect/Engineer's Substantial Completion inspection.
- F. Conduct Substantial Completion inspection and create Final Correction Punch List containing Architect/Engineer's and Contractor's comprehensive list of items identified to be completed or corrected and submit to Architect/Engineer.
- G. Correct items of work listed in Final Correction Punch List and comply with requirements for access to Owner-occupied areas.
- H. Notify Architect/Engineer when work is considered finally complete and ready for Architect/Engineer's Substantial Completion final inspection.
- I. Complete items of work determined by Architect/Engineer listed in executed Certificate of Substantial Completion.

**END OF SECTION**

**SECTION 01 77 00  
CLOSEOUT PROCEDURES**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES:**

- A. Substantial Completion Procedures.
- B. Final Completion Procedures.

**1.02 RELATED REQUIREMENTS:**

- A. Section 01 10 00 - Summary.
- B. Section 01 78 00 - Closeout Submittals.

**1.03 SUBSTANTIAL COMPLETION PROCEDURES**

- A. Substantial Completion Procedures will be in accordance with the Owner's General Conditions of the Contract for Construction, and include the following:
  - 1. When the Work or a portion of the Work is considered to be substantially complete, the Contractor inspects the project and prepares a comprehensive list of outstanding items to be completed or corrected, Initial Punch List.
  - 2. Contractor submits notice of Substantial Completion.
  - 3. Contractor completes items on the Initial Punch List.
  - 4. Architect/Engineer inspects the project to verify substantial completion and prepares a Final Punch List.
  - 5. Architect/Engineer prepares Certificate of Substantial Completion, acceptance is required by Owner and Contractor.

**1.04 FINAL COMPLETION PROCEDURES**

- A. Final Completion Procedures will be in accordance with the Owner's General Conditions of the Contract for Construction, and include the following:
  - 1. When items on Initial and Final Punch Lists are complete, submit notice of final completion and final application for payment.
  - 2. Submit Final Closeout Submittals as specified in Section 01 78 00.
  - 3. Architect will inspect project and verifies the Work is acceptable and conforms with the Contract Documents.
  - 4. Architect will process final application for payment and closeout submittals.

**1.05 CORRECTION PERIOD**

- A. Correction Period commences on the date of Substantial Completion and expires two years from that date.
- B. Owner: document non-conforming or defective work over course of Correction Period. Notify Contractor in writing of nonconforming or defective work. Copy Architect/Engineer.
  - 1. Life safety issues requiring immediate corrective work: Contact Contractor for action.

**PART 2 PRODUCTS - NOT USED.**

**PART 3 EXECUTION - NOT USED.**

**END OF SECTION**

**SECTION 01 78 00  
CLOSEOUT SUBMITTALS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Warranties and bonds.
- B. Project record documents.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 30 00 - Administrative Requirements: Submittals procedures, shop drawings, product data, and samples.
- B. Section 01 70 00 - Execution and Closeout Requirements: Contract closeout procedures.

**1.03 SUBMITTALS**

- A. Submit preliminary draft of proposed formats and outlines of contents of electronic Operation and Maintenance Manual, including warranties and bonds, record document Bookmarked Adobe PDF form before start of Work. Architect/Engineer will review draft and return with comments.
- B. Warranties and Bonds:
  - 1. Make other submittals within 10 days after Date of Substantial Completion, prior to final Application for Payment.
  - 2. For items of Work for which acceptance is delayed beyond Date of Substantial Completion, submit within 10 days after acceptance, listing the date of acceptance as the beginning of the warranty period.
- C. Project Record Documents: Submit documents to Architect/Engineer with claim for final Application for Payment.

**PART 2 PRODUCTS - NOT USED**

**PART 3 EXECUTION**

**3.01 WARRANTIES AND BONDS**

- A. Obtain warranties and bonds, executed in duplicate by responsible Subcontractors, suppliers, and manufacturers, within 10 days after completion of the applicable item of work. Except for items put into use with Owner's permission, leave date of beginning of time of warranty until Date of Substantial completion is determined.
- B. Verify that documents are in proper form, contain full information, and are notarized.
- C. Co-execute submittals when required.
- D. Retain warranties and bonds until time specified for submittal.
- E. Include originals of each in operation and maintenance manuals, indexed separately on Table of Contents.



- F. Include color, 300 dpi resolution scans of each in Operation and Maintenance Manual PDF file, Bookmarked and indexed separately in Table of Contents.

### **3.02 PROJECT RECORD DOCUMENTS**

- A. Maintain on site one set of the following record documents; record actual revisions to the Work:
  - 1. Drawings.
  - 2. Specifications.
  - 3. Addenda.
  - 4. Change Orders and other modifications to the Contract.
- B. Ensure entries are complete and accurate, enabling future reference by Owner.
- C. Store record documents separate from documents used for construction.
- D. Record information concurrent with construction progress.
- E. Specifications: Legibly mark and record at each product section description of actual products installed, including the following:
  - 1. Manufacturer's name and product model and number.
  - 2. Product substitutions or alternates utilized.
  - 3. Changes made by Addenda and modifications.
- F. Record Drawings and Shop Drawings: Legibly mark each item to record actual construction including:
  - 1. Measured depths of foundations in relation to finish first floor datum.
  - 2. Measured horizontal and vertical locations of underground utilities and appurtenances, referenced to permanent surface improvements.
  - 3. Measured locations of internal utilities and appurtenances concealed in construction, referenced to visible and accessible features of the Work.
  - 4. Field changes of dimension and detail.
  - 5. Details not on original Contract drawings.

**END OF SECTION**

**SECTION 01 79 00  
DEMONSTRATION AND TRAINING**

**PART 1 GENERAL**

**1.01 SUMMARY**

- A. Demonstration of products and systems where indicated in specific specification sections.
- B. Training of Owner personnel in operation and maintenance is required for:
  - 1. All software-operated systems.
  - 2. HVAC systems and equipment.
  - 3. Electrical systems and equipment.
  - 4. Items specified in individual product Sections.

**1.02 RELATED REQUIREMENTS**

- A. Section 01 91 13 - General Commissioning Requirements: Additional requirements applicable to demonstration and training.

**1.03 SUBMITTALS**

- A. See Section 01 30 00 - Administrative Requirements, for submittal procedures.
- B. Training Plan: Owner will designate personnel to be trained; tailor training to needs and skill-level of attendees.
  - 1. Submit to Architect/Engineer for transmittal to Owner.
  - 2. Submit not less than four weeks prior to start of training.
  - 3. Revise and resubmit until acceptable.
  - 4. Provide an overall schedule showing all training sessions.
  - 5. Include at least the following for each training session:
    - a. Identification, date, time, and duration.
    - b. Description of products and/or systems to be covered.
    - c. Name of firm and person conducting training; include qualifications.
    - d. Intended audience, such as job description.
    - e. Objectives of training and suggested methods of ensuring adequate training.
    - f. Methods to be used, such as classroom lecture, live demonstrations, hands-on, etc.
    - g. Media to be used, such as slides, hand-outs, etc.
    - h. Training equipment required, such as projector, projection screen, etc., to be provided by Contractor.
- C. Training Manuals: Provide training manual for each attendee; allow for minimum of two attendees per training session.
  - 1. Include applicable portion of O&M manuals.
  - 2. Include copies of all hand-outs, slides, overheads, video presentations, etc., that are not included in O&M manuals.
  - 3. Provide one extra copy of each training manual to be included with operation and maintenance data.
- D. Training Reports:
  - 1. Identification of each training session, date, time, and duration.
  - 2. Sign-in sheet showing names and job titles of attendees.

3. List of attendee questions and written answers given, including copies of and references to supporting documentation required for clarification; include answers to questions that could not be answered in original training session.
- E. Video Recordings: Submit digital video recording of each demonstration and training session for Owner's subsequent use.
1. Format: DVD Disc.
  2. Label each disc and container with session identification and date.

#### **1.04 QUALITY ASSURANCE**

- A. Instructor Qualifications: Familiar with design, operation, maintenance and troubleshooting of the relevant products and systems.
1. Provide as instructors the most qualified trainer of those contractors and/or installers who actually supplied and installed the systems and equipment.
  2. Where a single person is not familiar with all aspects, provide specialists with necessary qualifications.

### **PART 2 PRODUCTS - NOT USED**

### **PART 3 EXECUTION**

#### **3.01 DEMONSTRATION - GENERAL**

- A. Demonstrations conducted during system start-up do not qualify as demonstrations for the purposes of this section, unless approved in advance by Owner.
- B. Demonstration may be combined with Owner personnel training if applicable.
- C. Operating Equipment and Systems: Demonstrate operation in all modes, including start-up, shut-down, seasonal changeover, emergency conditions, and troubleshooting, and maintenance procedures, including scheduled and preventive maintenance.
1. Perform demonstrations not less than two weeks prior to Substantial Completion.
  2. For equipment or systems requiring seasonal operation, perform demonstration for other season within six months.
- D. Non-Operating Products: Demonstrate cleaning, scheduled and preventive maintenance, and repair procedures.
1. Perform demonstrations not less than two weeks prior to Substantial Completion.

#### **3.02 TRAINING - GENERAL**

- A. Conduct training on-site unless otherwise indicated.
- B. Owner will provide classroom and seating at no cost to Contractor.
- C. Provide training in minimum two hour segments.
- D. Training schedule will be subject to availability of Owner's personnel to be trained; re-schedule training sessions as required by Owner; once schedule has been approved by Owner failure to conduct sessions according to schedule will be cause for Owner to charge Contractor for personnel "show-up" time.
- E. Review of Facility Policy on Operation and Maintenance Data: During training discuss:
1. The location of the O&M manuals and procedures for use and preservation; backup copies.

2. Typical contents and organization of all manuals, including explanatory information, system narratives, and product specific information.
  3. Typical uses of the O&M manuals.
- F. Product- and System-Specific Training:
1. Review the applicable O&M manuals.
  2. For systems, provide an overview of system operation, design parameters and constraints, and operational strategies.
  3. Review instructions for proper operation in all modes, including start-up, shut-down, seasonal changeover and emergency procedures, and for maintenance, including preventative maintenance.
  4. Provide hands-on training on all operational modes possible and preventive maintenance.
  5. Emphasize safe and proper operating requirements; discuss relevant health and safety issues and emergency procedures.
  6. Discuss common troubleshooting problems and solutions.
  7. Discuss any peculiarities of equipment installation or operation.
  8. Discuss warranties and guarantees, including procedures necessary to avoid voiding coverage.
  9. Review recommended tools and spare parts inventory suggestions of manufacturers.
  10. Review spare parts and tools required to be furnished by Contractor.
  11. Review spare parts suppliers and sources and procurement procedures.
- G. Be prepared to answer questions raised by training attendees; if unable to answer during training session, provide written response within three days.

**END OF SECTION**

**SECTION 02 41 00  
DEMOLITION**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

A. Selective demolition of building elements for alteration purposes.

**1.02 RELATED REQUIREMENTS**

A. Section 01 10 00 - Summary: Limitations on Contractor's use of site and premises.

B. Section 01 50 00 - Temporary Facilities and Controls.

C. Section 01 60 00 - Product Requirements: Handling and storage of items.

**1.03 REFERENCE STANDARDS**

A. 29 CFR 1926 - Safety and Health Regulations for Construction; Current Edition.

B. NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2022, with Errata (2021).

**PART 2 PRODUCTS -- NOT USED**

**PART 3 EXECUTION**

**3.01 DEMOLITION**

A. Remove other items indicated, for salvage, relocation, and recycling.

**3.02 GENERAL PROCEDURES AND PROJECT CONDITIONS**

A. Comply with requirements in Section 01 70 00.

B. Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.

1. Obtain required permits.

2. Comply with applicable requirements of NFPA 241.

3. Provide, erect, and maintain temporary barriers and security devices.

4. Use physical barriers to prevent access to areas that could be hazardous to workers or the public.

5. Conduct operations to minimize effects on and interference with adjacent structures and occupants.

6. Do not close or obstruct roadways or sidewalks without permits from authority having jurisdiction.

7. Conduct operations to minimize obstruction of public and private entrances and exits. Do not obstruct required exits at any time. Protect persons using entrances and exits from removal operations.

C. Do not begin removal until receipt of notification to proceed from Owner.

D. Do not begin removal until built elements to be salvaged or relocated have been removed.

E. Protect existing structures and other elements to remain in place and not removed.

1. Provide bracing and shoring.
  2. Prevent movement or settlement of adjacent structures.
  3. Stop work immediately if adjacent structures appear to be in danger.
- F. Minimize production of dust due to demolition operations. Do not use water if that will result in ice, flooding, sedimentation of public waterways or storm sewers, or other pollution.
- G. Perform demolition in a manner that maximizes salvage and recycling of materials.
1. Dismantle existing construction and separate materials.
  2. Set aside reusable, recyclable, and salvageable materials; store and deliver to collection point or point of reuse.

### **3.03 EXISTING UTILITIES**

- A. Coordinate work with utility companies. Notify utilities before starting work, comply with their requirements, and obtain required permits.
- B. Protect existing utilities to remain from damage.
- C. Do not disrupt public utilities without permit from authority having jurisdiction.
- D. Do not close, shut off, or disrupt existing life safety systems that are in use without at least 7 days prior written notification to Owner.
- E. Do not close, shut off, or disrupt existing utility branches or take-offs that are in use without at least 3 days prior written notification to Owner.

### **3.04 SELECTIVE DEMOLITION FOR ALTERATIONS**

- A. Existing construction and utilities indicated on drawings are based on casual field observation and existing record documents only.
1. Verify construction and utility arrangements are as indicated.
  2. Report discrepancies to Architect/Engineer before disturbing existing installation.
  3. Beginning of demolition work constitutes acceptance of existing conditions that would be apparent upon examination prior to starting demolition.
- B. Separate areas in which demolition is being conducted from areas that remain occupied.
- C. Maintain weatherproof exterior building enclosure, except for interruptions required for replacement or modifications; prevent water and humidity damage.
- D. Remove existing work as indicated and required to accomplish new work.
1. Remove rotted wood, corroded metals, and deteriorated masonry and concrete; replace with new construction indicated.
  2. Remove items indicated on drawings.
- E. Services including, but not limited to, HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications: Remove existing systems and equipment as indicated.
1. Maintain existing active systems to remain in operation, and maintain access to equipment and operational components.
  2. Where existing active systems serve occupied facilities but are to be replaced with new services, maintain existing systems in service until new systems are complete and ready for service.
  3. Verify that abandoned services serve only abandoned facilities before removal.

4. Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings. Remove back to source of supply where possible, otherwise cap stub and tag with identification.
- F. Protect existing work to remain.
1. Prevent movement of structure. Provide shoring and bracing as required.
  2. Perform cutting to accomplish removal work neatly and as specified for cutting new work.
  3. Repair adjacent construction and finishes damaged during removal work.
  4. Patch to match new work.

### **3.05 DEBRIS AND WASTE REMOVAL**

- A. Remove debris, junk, and trash from site.
- B. Leave site in clean condition, ready for subsequent work.
- C. Clean up spillage and wind-blown debris from public and private lands.

**END OF SECTION**

**SECTION 26 05 00  
BASIC ELECTRICAL REQUIREMENTS**

**PART 1 GENERAL**

**1.01 RELATED DOCUMENTS**

- A. Drawings and general provisions of Contract, including the Owner's contracting requirements and Division 1 Specification Sections, apply to this Section.

**1.02 SECTION INCLUDES**

- A. Basic Electrical Requirements and materials specifically applicable to Division 26 Sections, in addition to Division 1 - General Requirements. Section includes:
  1. Electrical Identification.
  2. Minor Demolition.
  3. Conductors and Devices.
  4. Raceways and Boxes.
  5. Supporting Devices.

**1.03 REGULATORY REQUIREMENTS**

- A. Conform to NFPA 70 - National Electrical Code, 2021 edition with amendments as adopted by the Village of Oak Park, IL.
- B. Install electrical Work in accordance with the NECA Standard of Installation.

**1.04 DELIVERY, STORAGE AND HANDLING**

- A. Store and protect all materials as specified under the provisions of Section 01 60 00 and as specified herein.
- B. Deliver products to the project properly identified with names, model numbers, types, grades, compliance labels, and other information needed for identification.
- C. Ship products to the job site in their original packaging. Receive and store products in a suitable manner to prevent damage or deterioration. Keep equipment upright at all times.
- D. Investigate the spaces through which equipment must pass to reach its final destination. Coordinate with the manufacturer to arrange delivery at the proper stage of construction and to provide shipping splits where necessary.

**1.05 PROJECT/SITE CONDITIONS**

- A. Install work in locations shown on Drawings, unless prevented by Project conditions. Drawings have omitted certain branch circuitry in areas for ease of reading. All branch circuitry is to be provided by Contractor.
- B. Prepare drawings showing proposed rearrangement of Work to meet Project conditions, including changes to Work specified in other Sections. Obtain permission from Architect/Engineer before proceeding as specified under modification procedures.

**1.06 QUALITY ASSURANCE**

- A. Provide Work as required for a complete and operational electrical installation.



- B. All products shall be designed, manufactured, and tested in accordance with industry standards. Standards, organizations, and their abbreviations as used hereafter, include the following:
  - 1. American National Standards Institute, Inc (ANSI).
  - 2. American Society for Testing and Materials (ASTM).
  - 3. National Electrical Manufacturers Association (NEMA).
  - 4. Underwriters Laboratories, Inc. (UL).
- C. Install all Work in accordance with the NECA Standard of Installation.

## **1.07 SUBMITTALS**

- A. Submit all requested items in Division 26 Sections under provisions of Section 01 30 00.

## **1.08 SUBSTITUTIONS**

- A. Substitutions will be considered only as allowed within the provisions of Section 01 60 00.

## **1.09 PROJECT RECORD DOCUMENTS**

- A. Cooperate and assist in the preparation of project record documents under the provisions of Section 01 78 00.

## **1.10 PROJECT MANAGEMENT AND COORDINATION**

- A. Proper project management and coordination is critical for a successful project. Manage and coordinate the Work with all other trades in accordance with Section 01 30 00 requirements. Reliance on the Drawings and Specifications only for exact project requirements is insufficient for proper coordination.

## **PART 2 PRODUCTS**

### **2.01 WIRING METHODS**

- A. All locations: Building wire in raceway.
- B. Use no wire smaller than 12 AWG for power and lighting circuits, and no smaller than 14 AWG for control wiring.
  - 1. Use 10 AWG conductor for 20 ampere, 120 volt branch circuit home runs longer than 100 feet.

### **2.02 WIRE AND CABLE**

- A. Manufacturers:
  - 1. Okonite.
  - 2. Southwire.
  - 3. Collyer.
- B. Building Wire:
  - 1. Feeders and Branch Circuits Larger Than 6 AWG: Copper, stranded conductor, 600 volt insulation.
  - 2. Feeders and Branch Circuits 6 AWG and Smaller: Copper conductor, 600 volt insulation. 6 and 8 AWG, stranded conductor; smaller than 8 AWG, stranded conductor (solid for device terminations).
  - 3. Control Circuits: Copper, stranded conductor, 600 volt insulation.
  - 4. Use 10 AWG conductors for 20 ampere, 120 volt branch circuits longer than 75 feet.

5. Use 10 AWG conductors for 20 ampere, 277 volt branch circuits longer than 200 feet.
6. Use conductor not smaller than 12 AWG for power and lighting circuits.
7. Use conductor not smaller than 16 AWG for control circuits.

C. Locations:

1. Concealed Dry Interior Locations: Use only building wire with Type THHN insulation in raceway.
2. Exposed Dry Interior Locations: Use only building wire with Type THHN insulation in raceway.
3. Above Accessible Ceilings: Use only building wire with Type THHN insulation in raceway.
4. Wet or Damp Interior Locations: Use only building wire with Type THWN insulation in raceway.
5. Exterior Locations: Use only building wire with Type XHHW insulation in raceway.

## 2.03 RACEWAY REQUIREMENTS

A. Use only specified raceway in the following locations:

1. Branch Circuits and Feeders:
  - a. Concealed Dry Interior Locations: Electrical metallic tubing.
  - b. Exposed Dry Interior Finished Locations: Electrical metallic tubing.
  - c. Exposed Dry Interior Unfinished Locations: Electrical metallic tubing.
  - d. All other locations: Galvanized Rigid Metallic Conduit.

B. Size raceways for conductor type installed.

1. Minimum Size Conduit Homerun to Panelboard: 3/4-inch.

## 2.04 METALLIC CONDUIT AND FITTINGS

A. Conduit:

1. Rigid Steel Conduit: ANSI C80.1.
2. Electrical metallic tubing: ANSI C80.3.
3. Flexible Conduit: UL 1, zinc-coated steel.
  - a. Liquidtight Flexible Conduit: UL360. Fittings shall be specifically approved for use with this raceway.

B. Conduit Fittings:

1. Metal Fittings and Conduit Bodies: NEMA FB 1.
  - a. EMT fittings: Use set-screw indentor-type fittings.

## 2.05 CONDUIT HANGERS

A. Manufacturers:

1. Minerrallac Electric Company.
2. Substitutions: Or Approved Equal.

B. Description:

1. Standard conduit hanger, zinc-plated steel with bolts.
2. Threaded rod and hardware: Plated finish, size and length as required for loading and conditions.

## 2.06 BEAM CLAMPS

A. Manufacturers:

1. Appleton.
2. Midwest.

3. Raco.

B. Description: Malleable beam clamp, zinc plated steel.

## **2.07 ELECTRICAL BOXES**

A. Manufacturers:

1. Raco.
2. Steel City.
3. Appleton.
4. Substitutions: Or Approved Equal.

B. Sheet Metal Outlet Boxes: ANSI/NEMA OS 1, galvanized steel, suitable for installation in masonry:

C. Equipment Support Boxes: Rated for weight of equipment supported; include 2 inch male fixture studs where required.

D. Wet Location Outlet Boxes: Cast aluminum: Cast alloy, deep type, gasket cover, threaded hubs.

## **2.08 PENETRATION SEALANTS**

A. Fire-rated assemblies: Provide firestopping of all penetrations made by Work under this Contract in accordance with provisions of Section 07 84 00 requirements.

B. Thermal and Moisture Protection: Provide thermal and moisture protection made by Work under this Contract of all exterior wall, floor and roof penetrations in accordance with Division 7 requirements.

## **2.09 WIRE AND CABLE MARKERS**

A. Manufacturers:

1. Brady Model PCPS.
2. Panduit Model PCM.
3. T & B Model WM.

B. Description: Cloth type wire markers.

C. Locations: Each conductor at panelboard gutters, pull boxes, and each load connection.

D. Legend:

1. Power and Lighting Circuits: Branch circuit or feeder number indicated on drawings.

## **2.10 CONDUIT MARKERS**

A. Location: Furnish markers for each conduit longer than 6 feet.

B. Spacing: 20 feet on center.

C. Color:

1. 480 Volt System: Orange
2. 208 Volt System: Black
3. Fire Alarm System: Red.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION AND PREPARATION**

- A. Demolition Drawings are based on casual field observation and are intended to identify the limits of the construction site. Remove all electrical systems in their entirety in proper sequence with the Work.
- B. Disconnect electrical systems in walls, floors, and ceilings for removal.
- C. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on energized equipment or circuits, use personnel experienced in such operations.
- D. Existing Electrical Service and Emergency Electrical Service: Maintain existing system in service. Disable system only to make switchovers and connections. Obtain permission from Owner and Architect at least 24 hours before partially or completely disabling system. Minimize outage duration. Make temporary connections to maintain service in areas adjacent to work area.
- E. Beginning of demolition means installer accepts existing conditions.
- F. Verify that supporting surfaces are ready to receive work.
- G. Electrical boxes are shown on Drawings, in approximate locations, unless dimensioned.
  - 1. Obtain verification from Architect/Engineer for locations of outlets throughout prior to rough-in.
- H. Degrease and clean surfaces to receive wire markers.
- I. Verify that interior of building is physically protected from weather.
- J. Verify that mechanical work which is likely to injure conductors has been completed.
- K. Completely and thoroughly swab raceway system before installing conductors.

### **3.02 DEMOLITION AND EXTENSION OF EXISTING ELECTRICAL WORK**

- A. Remove all existing electrical installations to accommodate new construction.
- B. Remove abandoned wiring to source of supply.
- C. Remove exposed abandoned conduit, including abandoned conduit above accessible ceiling finishes. Cut conduit flush with walls and floors, and patch surfaces.
- D. Repair adjacent construction and finishes damaged during demolition and extension work.

### **3.03 APPLICATION**

- A. Install nameplate and label parallel to equipment lines.
- B. Secure nameplate to equipment front using screws.
- C. Secure nameplates to inside surface of door on panelboard that is recessed in finished locations.
- D. Neatly train and secure wiring inside boxes, equipment, and panelboards.
- E. Route wire and cable as required to meet project conditions.
  - 1. Wire and cable routing indicated is approximate unless dimensioned.

2. Where wire and cable destination is indicated and routing is not shown, determine exact routing and lengths required.
- F. Pull all conductors into raceway at same time.
  - G. Protect exposed cable from damage.
  - H. Neatly train and lace wiring inside boxes, equipment and panelboards.
  - I. Support cables above accessible ceilings to keep them from resting on ceiling tiles.
  - J. Make splices, taps, and terminations to carry full ampacity of conductors without perceptible temperature rise.
  - K. Use split bolt connectors for copper conductor splices and taps, 6 AWG and larger. Tape uninsulated conductors and connector with electrical tape to 150 percent of insulation rating of conductor.
  - L. Provide anchors, fasteners, and supports in accordance with NECA "Standard of Installation".
  - M. Do not fasten supports to pipes, ducts, mechanical equipment, and conduit.
  - N. Do not use powder-actuated anchors.
  - O. Do not drill or cut structural members.
  - P. Fabricate supports from structural steel or steel channel. Rigidly weld members or use hexagon head bolts to present neat appearance with adequate strength and rigidity. Use spring lock washers under all nuts.
  - Q. Install surface-mounted cabinets and panelboards with minimum of four anchors.
  - R. In wet and damp locations use steel channel supports to stand cabinets and panelboards one inch off wall.
  - S. Use sheet metal channel to bridge studs above and below cabinets and panelboards recessed in hollow partitions.
  - T. Terminate spare conductors with electrical tape.
  - U. Do not share neutral conductor on load side of dimmers.
  - V. Install wiring devices in accordance with manufacturer's instructions.
    1. Install wall switches at height shown on drawings, OFF position down.
    2. Install convenience receptacles at height shown on drawings grounding pole on bottom.
    3. Install specific purpose receptacles at heights shown on Drawings.
  - W. Install wall plates flush and level.
    1. Install decorative plates on switch, receptacle, and blank outlets in finished areas.
    2. Install galvanized steel plates on outlet boxes and junction boxes in unfinished areas, above accessible ceilings, and on surface-mounted outlets.

## END OF SECTION

**SECTION 26 05 83  
WIRING CONNECTIONS**

**PART 1 GENERAL**

**1.01 SECTION INCLUDES**

- A. Electrical connections to equipment and devices not and integral part of the electrical distribution system.

**1.02 REFERENCE STANDARDS**

- A. NFPA 70 - National Electrical Code; Most Recent Edition Adopted by Authority Having Jurisdiction, Including All Applicable Amendments and Supplements.

**1.03 ADMINISTRATIVE REQUIREMENTS**

- A. Provide conduit rough-in and electrical connection to powered equipment and devices identified in the Project Manual and on the Drawings. Refer specifically, but not limited to, these drawings and manufacturer's installation instructions.
- B. Coordination: Determine connection locations and requirements for furniture, equipment and devices furnished or provided under other sections.
  - 1. Do not rely solely on the Drawings and Project Manual for execution of the Work of this Section.
  - 2. Obtain and review shop drawings, product data, manufacturer's wiring diagrams, and manufacturer's instructions.
  - 3. Include necessary field evaluation time to inspect connection requirements.
  - 4. Coordinate with other trades to determine exact rough-in requirements.
- C. Sequencing:
  - 1. Install rough-in of electrical connections before installation of furniture and equipment is required.
  - 2. Make electrical connections before required start-up of equipment.

**1.04 QUALITY ASSURANCE**

- A. Comply with requirements of NFPA 70.
- B. Products: Listed, classified, and labeled as suitable for the purpose intended.

**PART 2 PRODUCTS**

**2.01 EQUIPMENT CONNECTIONS**

- A. EUH-7,13,14,22,23:
  - 1. Electrical Connection: Flexible conduit. Disconnect and protect existing branch circuitry for re-use.
  - 2. Unit furnished with field installed disconnect switch. Install disconnect switch.
  - 3. Voltage: Refer to ELECTRIC UNIT HEATER SCHEDULE.
  - 4. Load rating: Refer to ELECTRIC UNIT HEATER SCHEDULE.
  - 5. FLA: Refer to ELECTRIC UNIT HEATER SCHEDULE.
  - 6. Location: See floor plans.
- B. CUH-1,2:

1. Electrical Connection: Flexible conduit. Disconnect and protect existing branch circuitry for re-use.
  2. Unit furnished with field installed disconnect switch. Install disconnect switch.
  3. Voltage: Refer to ELECTRIC UNIT HEATER SCHEDULE.
  4. Load rating: Refer to ELECTRIC UNIT HEATER SCHEDULE.
  5. FLA: Refer to ELECTRIC UNIT HEATER SCHEDULE.
  6. Location: See floor plans.
- C. EF-1: Alternate No. 5
1. Electrical Connection: Flexible conduit. Disconnect and protect existing branch circuitry for re-use.
  2. Unit furnished with pre-wired disconnect switch.
  3. Voltage: 460V, 3PH, 60Hz.
  4. Load rating: 3/4 HP.
  5. FLA: 1.6A.
  6. Location: See floor plans.
- D. EDH-1: Alternate No. 1
1. Electrical Connection: Flexible conduit. Disconnect and protect existing branch circuitry for re-use.
  2. Unit furnished with pre-wired door-interlock disconnect switch.
  3. Voltage: 460V, 3PH, 60Hz.
  4. Load rating: 21kW.
  5. FLA: 25.2A.
  6. Location: See floor plans.
- E. EUH-A,B,C,D: Alternate No. 3 - Provide unit pricing for all materials and labor required to remove existing unit heater and install new unit heater.
1. Electrical Connection: Flexible conduit. Disconnect and protect existing branch circuitry for re-use.
  2. Unit furnished with field installed disconnect switch. Install disconnect switch.
  3. Voltage: Refer to ALTERNATE NO. 3 - ELECTRIC UNIT HEATER SCHEDULE.
  4. Load rating: Refer to ALTERNATE NO. 3 - ELECTRIC UNIT HEATER SCHEDULE.
  5. FLA: Refer to ALTERNATE NO. 3 - ELECTRIC UNIT HEATER SCHEDULE.
  6. Location: See floor plans.
- F. CUH-A,B,C,D: Alternate No. 3 - Provide unit pricing for all materials and labor required to remove existing unit heater and install new unit heater.
1. Electrical Connection: Flexible conduit. Disconnect and protect existing branch circuitry for re-use.
  2. Unit furnished with field installed disconnect switch. Install disconnect switch.
  3. Voltage: 480V, 3PH, 60Hz.
  4. Load rating: Refer to ALTERNATE NO. 3 - ELECTRIC UNIT HEATER SCHEDULE.
  5. FLA: Refer to ALTERNATE NO. 3 - ELECTRIC UNIT HEATER SCHEDULE.
  6. Location: See floor plans.

## **PART 3 EXECUTION**

### **3.01 EXAMINATION**

- A. Verify that equipment is ready for electrical connection, wiring, and energization.

### **3.02 ELECTRICAL CONNECTIONS**

- A. Make electrical connections in accordance with equipment manufacturer's instructions.
- B. Make conduit connections to equipment using flexible conduit. Use liquidtight flexible conduit with watertight connectors in damp or wet locations.
- C. Connect heat producing equipment using wire and cable with insulation suitable for temperatures encountered.
- D. Install disconnect switches, controllers, control stations, and control devices to complete equipment wiring requirements.
- E. Install terminal block jumpers to complete equipment wiring requirements.
- F. Install interconnecting conduit and wiring between devices and equipment to complete equipment wiring requirements.

**END OF SECTION**